


### Overview

#### HPE ProLiant DL325 Gen11

Are you looking for a scalable, low-cost performance server solution for your virtualized and software-defined compute workloads? The HPE ProLiant DL325 Gen11 server is a low-cost 1U 1P solution that delivers exceptional value balancing compute performance, network bandwidth at 1P economics. Powered by 4th Generation AMD EPYC™ Processors with up to 128 cores, in-cache memory (up to 3 TB), high-speed PCIe Gen5 I/O and EDSFF storage, and supporting up to 2 GPUs at the front, this is a low-cost, 1U 1P, performance solution for your virtualized workloads. The silicon root of trust anchors the server firmware fingerprint for the AMD Secure Processor that must be matched exactly before the server will boot. The HPE ProLiant DL325 Gen11 server is an excellent choice for virtualized workloads such as software-defined compute, CDN, VDI, and secure edge computing. It features a high-performance, low-power processor, memory, and network bandwidth.

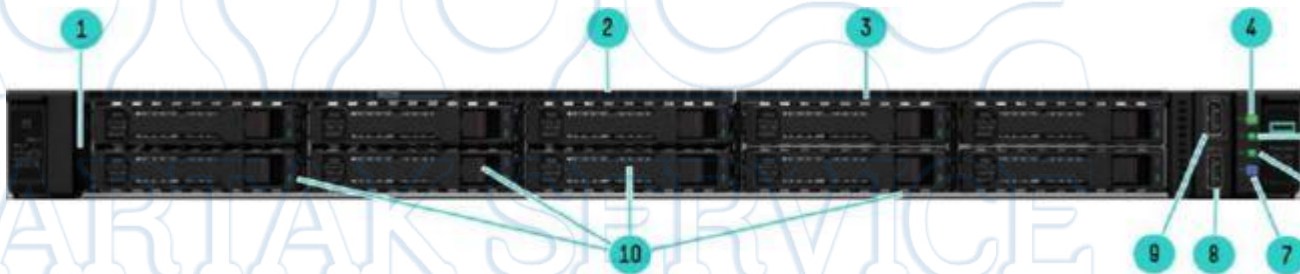


**Front View - 8 SFF + optional 2 SFF Drive Bay shown**

- |   |                        |
|---|------------------------|
| 1. Serial number pull tab                       | 6. NIC status LED      |
| 2. Quick removal access panel                   | 7. Unit ID button/ LED |
| 3. 2 SFF Cage Bay (Optional - shown) *          | 8. USB 3.2 Gen1 port   |
| 4. Power On/Standby button and system power LED | 9. iLO Service Port    |
| 5. Health LED                                   | 10. 8 SFF Cage Bay     |

**Notes:** Optional: Optical Drives

Overview

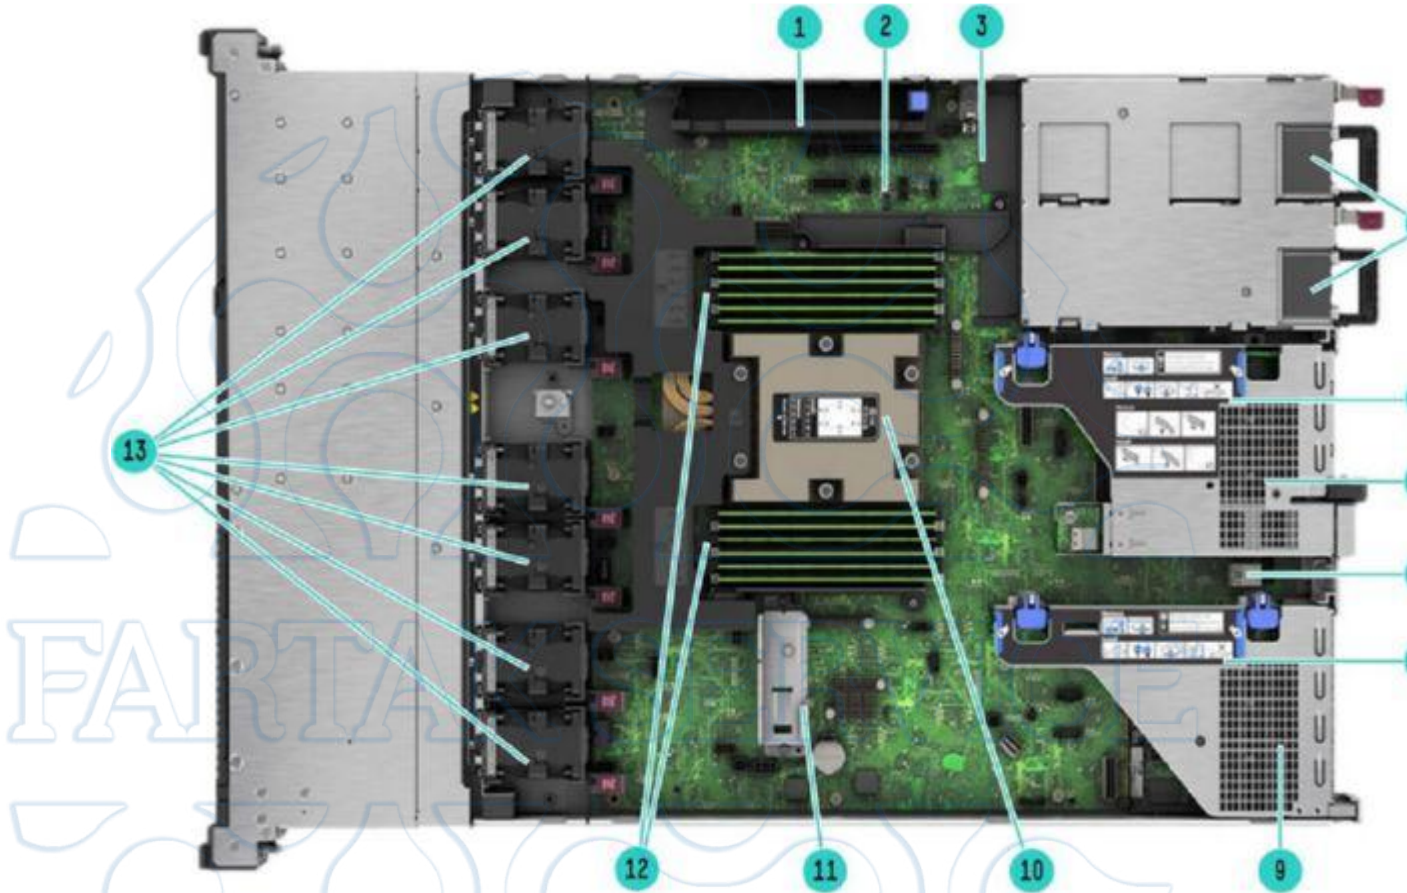


**Internal View - Standard for all HPE ProLiant DL325 Gen 11**

- |  |  |
|--|--|
| 1. Megacell battery holder                                     | 8. Primary PCIe 5.0 riser                      |
| 2. Hard drive backplane power connectors                       | 9. OCP 3.0 Slot 21 (Under)                     |
| 3. Chassis intrusion detection connector                       | 10. Processor is shown with standard heat sink |
| 4. Up to 2 Hot Plug redundant HPE Flexible Slot Power supplies | 11. FHFL PCIe card holder                      |
| 5. Secondary PCIe 5.0 riser                                    | 12. DDR5 DIMM slots <sup>2</sup>               |
| 6. OCP 3.0 Slot 22 (Under)                                     | 13. Hot-plug fans <sup>3</sup>                 |
| 7. Internal Dual USB 3.2 Gen1 port                             |  |

**Notes:**

- <sup>1</sup>Optional: Performance Heat Sink and Closed-Loop Liquid Cooling Heat Sink
- <sup>2</sup>Fully populated 12 DIMMs shown.
- <sup>3</sup>7 dual-rotor standard fans shown. Optional: Performance Fans and Liquid Cooling Fans

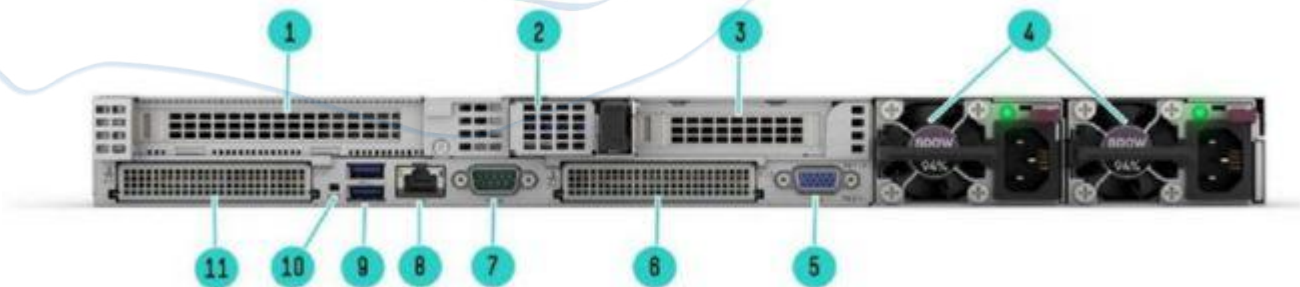

### Overview

#### Rear View - Secondary Low Profile Riser Shown

1. Slot 1 Primary PCIe 5.0 Riser
2. Optional NS204i-u hot-plug NVMe boot device
3. Slot 2 Secondary PCIe 5.0 Riser<sup>1</sup>
4. Hot-plug Power Supply 1 and 2<sup>2</sup>
5. Video (VGA) port
6. OCP 3.0 Slot 22
7. Optional Serial port
8. Dedicated iLO management port
9. USB 3.1 Gen1 Ports (2)
10. Unit ID LED
11. OCP 3.0 Slot 21

#### Notes:

–<sup>1</sup>low profile and full height options

–<sup>2</sup>Hot-plug Power Supply 2 is optional

### What's New

- All new DL325 Gen11
- New 4<sup>th</sup> Generation AMD EPYC™ Processors, up to 96 cores, 400W, and 384MB of L3 Cache.
- New DDR5 Smart Memory - 4800MT/s.
- New PCIe Gen5 support.
- New HPE Integrated Lights-Out 6 (iLO 6) server management software.
- New hot-pluggable NS204i-u Boot Device.
- New 20 EDSFF E3.S 1T Drive bays.
- New GPU support, up to two single-width or two double-width GPUs.
- OpenBMC Capable through iLO6 Transfer of Ownership Process

### Platform Information

#### Form Factor

- 1U rack

#### Chassis Types

- 8 SFF with optional 2 SFF drive bay or optical drive.
- 4 LFF with an optional optical drive
- 20 EDSFF E3.S 1T drive bay.
- 2 Single Width or 2 Double Width GPUs with 8 EDSFF or 4 SFF drive bay.

#### System Fans

- Choice of Standard Fan Kit, Performance Fan, and Liquid cooling Fan Kit

#### Notes:

- The DL325 Gen11 supports up to 7 fans with fan redundancy built in. One fan rotor failure will place the server in degraded fully functional. Two fan rotor failures could provide a warning and imminent server shutdown.
- Each Fan kit is designated to operate under different configurations. Please refer to the cooling option message in the user guide section for more information.


## Standard Features

**Processors** - One of the following, depending on the model.

**Notes:** For more information regarding AMD EPYC processors, please see the following:

<https://www.amd.com/en/processors/epyc-9004-series>

<https://www.amd.com/en/products/epyc>

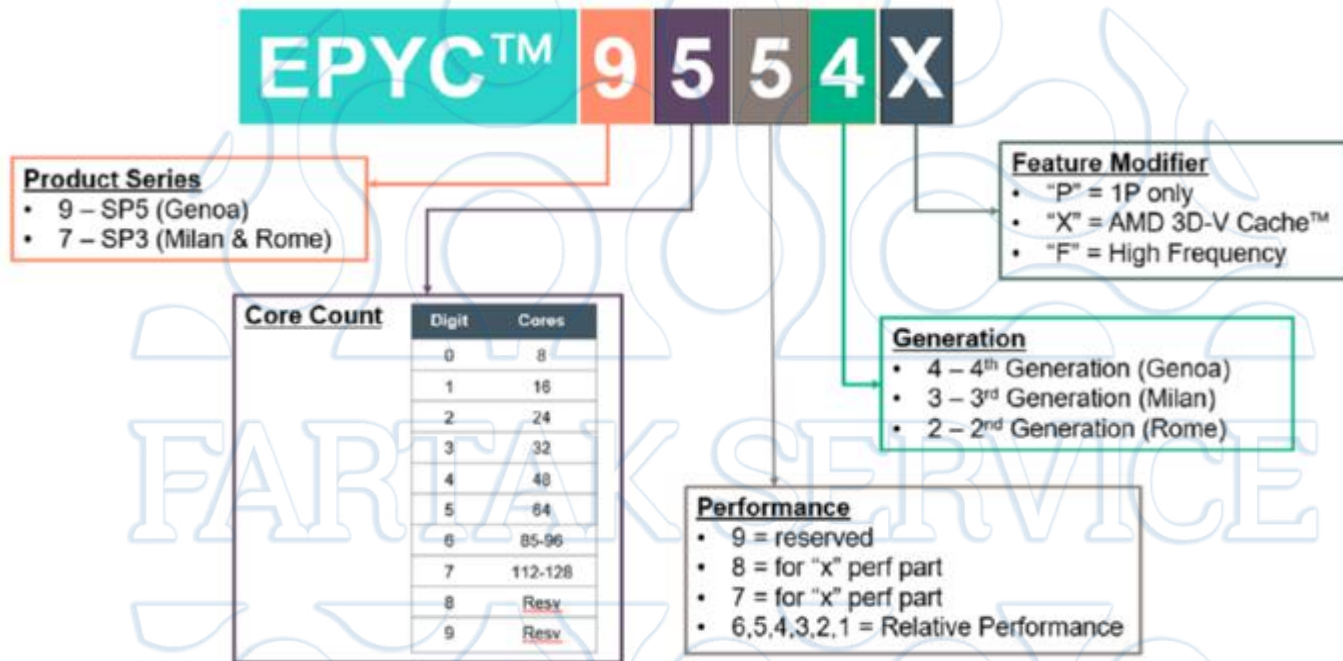

4 <sup>th</sup> Gen AMD EPYC Processor	Cores	Base Frequency	Max Frequency	Max Memory	Wattage	Cache	Memory
EPYC 9754	128	2.25 GHz	3.1 GHz	3TB	360	256	4800MT/s
EPYC 9734	112	2.2 GHz	3.0 GHz	3TB	340	256	4800MT/s
EPYC 9654P	96	2.4 GHz	3.7 GHz	3TB	360	384	4800MT/s
EPYC 9634	84	2.25 GHz	3.7 GHz	3TB	290	384	4800MT/s
EPYC 9554P	64	3.1 GHz	3.75 GHz	3TB	360	256	4800MT/s
EPYC 9534	64	2.45 GHz	3.7 GHz	3TB	280	256	4800MT/s
EPYC 9454P	48	2.75 GHz	3.8 GHz	3TB	290	256	4800MT/s
EPYC 9474F	48	3.6 GHz	4.1 GHz	3TB	360	256	4800MT/s
EPYC 9354P	32	3.25 GHz	3.8 GHz	3TB	280	256	4800MT/s
EPYC 9334	32	2.7 GHz	3.9 GHz	3TB	210	128	4800MT/s
EPYC 9374F	32	3.85 GHz	4.3 GHz	3TB	320	256	4800MT/s
EPYC 9254	24	2.9 GHz	4.15 GHz	3TB	200	128	4800MT/s
EPYC 9224	24	2.5 GHz	3.7 GHz	3TB	200	64	4800MT/s
EPYC 9274F	24	4.05 GHz	4.3 GHz	3TB	320	256	4800MT/s
EPYC 9124	16	3 GHz	3.7 GHz	3TB	200	64	4800MT/s
EPYC 9174F	16	4.1 GHz	4.4 GHz	3TB	320	256	4800MT/s
EPYC 9684X	96	2.55 GHz	3.7 GHz	3TB	400	1150	4800MT/s
EPYC 9384X	32	3.1 GHz	3.9 GHz	3TB	320	768	4800MT/s
EPYC 9184X	16	3.55 GHz	4.2 GHz	3TB	320	768	4800MT/s

**Notes:**

– 6096pin LGA SP5 new socket type.

– 1MB L2/Core, Up to 32MB L3/CCD

– All 4th generation AMD EPYC processors can support up to 3TB of memory each under 1DPC, 12 channels per

### Standard Features

- processor.
- 128 PCIe 5.0 Lanes
- 64 IO Lanes support CXL1.1+ with bifurcations supported down to x4
- The wattage information indicates the processor's default cTDP (Configurable TDP).

### Chipset

No chipset - System on Chip (SoC) design.

### On System Management Chipset

HPE iLO 6 ASIC

**Notes:** Read and learn more in the [iLO QuickSpecs](#).

### Memory

<b>Type</b>	HPE DDR5 Smart Memory Registered (RDIMM)
<b>DIMM Slots Available</b>	12 12 DIMM slots per processor, 12 channels per processor, 1 DIMM per channel
<b>Maximum capacity (RDIMM)</b>	3.0 TB 12 x 256 GB RDIMM @ 4800 MT/s at 1 DPC

#### Notes:

- All processors support up to 3TB of memory per server.
- LRDIMM and Persistent Memory are not supported.
- For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#)
- For the Memory Population Rules and Guidelines with AMD EPYC 9004 series processors, see details here: <https://www.hpe.com/psnow/doc/a50007481enw>

### Memory Protection

#### Advanced ECC

Advanced ECC uses single-device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

#### Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

**Notes:** For more information see our [Memory RAS feature technical whitepaper](#).


### Expansion Slots

## Standard Features

Slots #	Technology	Bus Width	Connector Width	Slot Form Factor
1 (Default Primary Riser)	PCIe 5.0	X16	X16	Full-height, Full-length slot
2 (Secondary Riser)	PCIe 5.0	X16	X16	Low Profile or Full-height, Half-length slot
21	PCIe 5.0	X8	X16	OCP 3.0
22	PCIe 5.0	X8	X16	OCP 3.0

### Notes:

- Both OCP slots (slot 21 and 22) support shared NIC and WOL (wake on lan) functions.
- If NS204i-u Boot Device is selected then low profile secondary riser (P55029-B21) must be selected.
- Requires a FHFL card holder to support the full-length cards at primary riser.

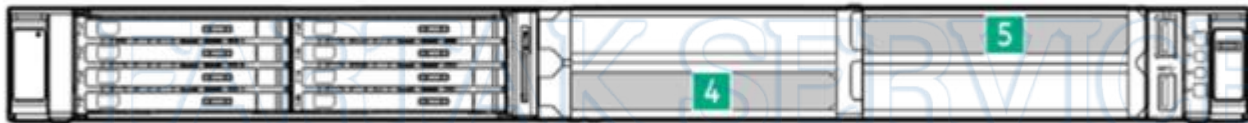

Front risers of GPU CTO server

Front Riser				
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor
4	PCIe 5.0	X16	X16	Full-height, Full-length slot
5	PCIe 5.0	X16	X16	Full-height, Full-length slot

### Notes:

- When supporting Slot4 & Slot21 scenario, Slot4 & OCP 21 slot combined can support up to 112GB/s bandwidth due to AMD CPU limitation.
- When supporting Slot5 & Slot1 scenario, Slot 5 & Slot1 combined can support up to 112GB/s bandwidth due to AMD CPU limitation.
- The extension slots at the front of GPU CTO server do not support external cabling.

## Storage Controllers

### Boot Device

- HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device

### Notes:

- Can only be selected without M.2 enablement kit.
- Includes Hot Plug capable dual 480GB NVMe M.2 automatically configured into a RAID 1 Mirror

## Standard Features

- Externally accessible but does not occupy a PCIe slot
- Requires specific cable kit and secondary low-profile riser along with specific cooling selections based on configuration
  - HPE DL325 Gen11 NVMe/SATA M.2 Enablement kit

### Notes:

- Internal accessible but does not occupy a PCIe slot
- No hardware RAID support and requires selection of SATA or NVMe M.2 SSDs as none are included

## Essential RAID Controller

- HPE Smart Array E208e-p SR Gen10 Controller

## Tri-Mode Controller

- HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller
- HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller
- HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
- HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller
- HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller
- HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage

**Notes:** For additional details, please visit: <https://www.hpe.com/psnow/doc/a50004311enw>

## HPE Compute MR Gen11 Controllers Quick Spec

## HPE Compute SR Gen11 Controllers Quick Spec

## Internal Storage Devices

### Optical Drive

- Available on 8SFF and 4LFF CTO Servers as an option (DVD-ROM or DVD-RW)

### Drives

- None ship standard

Maximum Storage		
	Capacity	Configuration
Hot Plug LFF SAS HDD	80 TB	4 x 20 TB
Hot Plug LFF SATA HDD	80 TB	4 x 20 TB
Hot Plug SFF SAS SSD	76.8 TB	10 x 7.68 TB
Hot Plug SFF SATA SSD	76.8 TB	10 x 7.68 TB
Hot Plug SFF NVMe PCIe U.3 SSD	153.6 TB	10 x 15.36 TB
Hot Plug EDSFF E3.S 1T NVMe SSD	307.2 TB	20 x 15.36 TB
M.2 22110 NVMe SSD	3.84 TB	2 x 1.92 TB (via M.2 enablement Kit)
M.2 2280 SATA SSD	960 GB	2 x 480 GB (via M.2 enablement Kit)

### Standard Features

#### Interfaces

<b>Serial</b>	1 optional port - rear
<b>Video Port</b>	1 standard VGA Port - rear
<b>Network Ports</b>	None. Choice of OCP or stand-up card, supporting a wide arrange of NIC adapters  BTO models will come pre-selected with a primary networking card.
<b>HPE iLO Remote Mgmt Port</b>	1 1Gb Dedicated - rear
<b>Front iLO Service Port</b>	1 standard
<b>USB 3.2 Gen1</b>	5 standard on all models: 1 front, 2 rear, 2 internal

#### Graphics

##### Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

##### HPE iLO 6 on system management memory

- 64 MB Flash
- 8 Gbit DDR 4 with ECC protection

#### Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 94% Power Efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 94% Power Efficiency.
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 96% Power Efficiency.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 94% Power Efficiency.
- HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit  
**Notes:** Available in 94% Power Efficiency. 200-240VAC power input only.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, and tool-less installation into HPE ProLiant Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

### Standard Features

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

---

### Operating Systems and Virtualization Software Support for ProLiant Servers

- [Windows Server 2019](#)
  - [Windows Server 2022](#)
  - [Red Hat Enterprise Linux \(RHEL\) 8.6](#)
  - [Red Hat Enterprise Linux \(RHEL\) 9.0](#)
  - [SUSE Linux Enterprise Server \(SLES\) 15 SP4](#)
  - [VMware ESXi 7.0 U3](#)
  - [VMware ESXi 8.0](#)
- 

### Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- VGA/Display Port
- USB 3.2 Gen1 Compliant
- USB 2.0 Compliant
- Energy Star
- SMBIOS 3.1
- UEFI 2.7
- UEFI Class 3
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

**Notes:** For additional technical thermal details regarding ambient temperatures, humidity, and features support please visit: [Extended Ambient Temperature Guidelines for HPE Gen11 servers](#)

- UEFI (Unified Extensible Firmware Interface Forum)
  - APML 1.0
-

### Standard Features

#### Embedded Management

##### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting, and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

##### UEFI

Configure and boot your servers securely with industry-standard Unified Extensible Firmware Interface (UEFI).

##### Intelligent Provisioning

Hassle-free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at [https://support.hpe.com/hpsc/public/docDisplay?docId=c04465280&docLocale=en\\_US](https://support.hpe.com/hpsc/public/docDisplay?docId=c04465280&docLocale=en_US)

##### iLO RESTful API

iLO RESTful API is DMTF Redfish API implementation and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at

<http://www.hpe.com/info/restfulapi>.

##### OpenBMC Support

OpenBMC Capable through iLO6 Transfer of Ownership Process.

Learn more at [OpenBMC Support](#)

---

#### HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secure configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation.

##### UEFI enables numerous new capabilities specific to HPE ProLiant servers such as

- Secure Boot and Secure Start enable enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.1 Gen1 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization
- Embedded TPM Support

##### UEFI Boot Mode only

- NVMe Boot Support
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

##### Notes:

- For UEFI Boot Mode, boot environment and OS image installation should be configured properly to support UEFI

### Standard Features

- TPM is embedded on DL325 Gen11 mainboard and does not require additional option kit selection to enable this function.

---

### Server Utilities

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

#### Active System Health Viewing

The Active System Health Viewer (ASHV) is deprecated as of March 2022. Users are now recommended to use the InfoSight for Servers Portal for AHS viewing capabilities. In InfoSight for Servers portal, users will also be able to view hardware configuration details, firmware and driver information, warranty and support status of a server, wellness alerts, and create support cases for servers under a valid warranty or support contract. HPE InfoSight provides the same security assurances as that of ASHV. Furthermore, InfoSight can be used as an ASHV replacement even if customers do not want to share ASHV logs and telemetry data on an ongoing basis.

#### Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/servers/smart-update.html>

#### iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory, and update Gen8, Gen9, Gen10, and Gen10 Plus HPE servers. Use an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

#### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

#### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

#### HPE OneView Standard

HPE OneView is an on-premises, multi-generational server monitoring, and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license, all provided by the same tool. Learn more at <http://www.hpe.com/info/oneview>.

### Standard Features

---

#### HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

A 3-year subscription to HPE GreenLake for Compute Ops Management is added by default when ordering an HPE ProLiant Gen11 rack, tower, or micro server.

For more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

---

#### Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-3 validation (iLO 6 certification in progress)
- Common Criteria certification (iLO 6 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Tamper-free updates - components digitally signed and verified
- Secure Recovery - recover critical firmware to a known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 2.0 option

**Notes:** TPM is embedded on DL325 Gen11 mainboard and does not require additional option kit selection to enable this function.

- Bezel Locking Kit option
  - Chassis Intrusion detection option
-

### Standard Features

#### Server Management

##### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the fully integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

##### HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It builds upon the base features of HPE OneView Standard and provides full-featured licenses which can be purchased for managing multiple HPE server generations. To learn more visit

<http://www.hpe.com/info/oneview>.

##### HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time, and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

---

#### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair are available for three years from the date of purchase. Support for software and initial setup is available for 90 days from the date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**Notes:** Server Warranty includes 3-Year Parts, 3-Year Labor, and 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/us/en/search-results.html?page=1&q=servers%20warranty&autocomplete=0>

---

### Optional Features

#### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management, and system access. HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with the enhanced airflow and thermal management, flexible cable management, and a 10-year Warranty to support higher-density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments, and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type of workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs, and UPSs at [HPE Rack and Power Infrastructure](#).

---

#### One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use it in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>

---



### Service and Support

#### HPE Pointnext - Service and Support

No matter where you are in your digital transformation journey, you can count on HPE Pointnext Services to provide the expertise you need, when and where you need it.

##### Advisory and Professional Services

Our Digital Next Advisory approach can help you identify, prioritize, and implement the right transformation initiatives to create new edge experiences, get real-time insights from all your data, and modernize your IT to enable new opportunities.

##### Operational Services

Take your IT operations to the next level with expertise and tools that can help save your staff time, manage complexity, and identify new ways to drive efficiency and effectiveness in your IT.

##### HPE Pointnext Tech Care

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

##### HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All are delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>

---

#### HPE Lifecycle Services

Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Installation and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- HPE Implementation Assistance Service: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

### Service and Support

– For a list of the most frequently purchased services using service credits, see the [Universal Service Credits Menu](#)

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

### Consume IT on your terms

HPE Support Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find HPE Support Services at <https://ssc.hpe.com/portal/site/ssc/>

**HPE GreenLake** brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

### Managed services to run your IT operations

**HPE GreenLake Management Services** provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

---



### Pre-configured Models

Model	Base	Performance
<b>SKU Number</b>	P58690-B21 P58690-291 P58690-AA1	P58691-B21 P58691-291 P58691-AA1
<b>Model Name</b>	HPE ProLiant DL325 Gen11 9124 3.0GHz 16C 1P 32GB-R MR408i-o 8SFF 800W PS Server	HPE ProLiant DL325 Gen11 9354P 3.25GHz 32C 1P 32GB-R MR408i-o 8SFF 800W PS Server
<b>Processor</b>	9124 (16-Core, 3.0 GHz, 200W)	9354P (32-Core, 3.25 GHz, 280W)
<b>Number of Processors</b>	One processor	One processor
<b>Memory</b>	32 GB RDIMM SR 1Rx4 4800 MT/s (1x 32 GB)	32 GB RDIMM SR 1Rx4 4800 MT/s (1x 32 GB)
<b>Network Controller</b>	HPE 1GbE 4-port Base-T OCP3 Adapter plus the choice of OCP or standup card	HPE 10GbE 2-port Base-T OCP3 Adapter plus the choice of OCP or standup card
<b>Storage Controller</b>	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
<b>Drive</b>	None ship as standard	None ship as standard
<b>Internal Storage</b>	8 SFF Chassis (upgradeable to 10 SFF front)	8 SFF Chassis (upgradeable to 10 SFF front)
<b>Optical Drive</b>	None ship as standard	None ship as standard
<b>PCI-Express Slots</b>	1 PCIe x16 Primary Riser	1 PCIe x16 Primary Riser
<b>Power Supply</b>	1x 800W HPE FlexSlot Power Supply	1x 800W HPE FlexSlot Power Supply
<b>Fans</b>	7- standard fans	7- Performance fans
<b>Management</b>	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
<b>Energy Star</b>	3.0 certified	3.0 certified
<b>Form Factor</b>	1U Rack	1U Rack
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.	3-year parts, 3-year labor, 3-year onsite support with next business day response.

SKU Number	P58690-421	P58691-421
<b>Model Name</b>	HPE ProLiant DL325 Gen11 9124 3.0GHz 16C 1P 32GB-R MR408i-o 8SFF 1000W PS Server	HPE ProLiant DL325 Gen11 9354P 3.25GHz 32C 1P 32GB-R MR408i-o 8SFF 1000W PS Server
<b>Processor</b>	9124 (16-Core, 3.0 GHz, 200W)	9354P (32-Core, 3.25 GHz, 280W)
<b>Number of Processors</b>	One processor	One processor
<b>Memory</b>	32 GB RDIMM DR 2Rx8 4800 MT/s (1x 32 GB)	32 GB RDIMM DR 2Rx8 4800 MT/s (1x 32 GB)
<b>Network Controller</b>	HPE 1GbE 4-port Base-T OCP3 Adapter plus the choice of OCP or standup card	HPE 10GbE 2-port Base-T OCP3 Adapter plus the choice of OCP or standup card
<b>Storage Controller</b>	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
<b>Drive</b>	None ship as standard	None ship as standard
<b>Internal Storage</b>	8 SFF Chassis (upgradeable to 10 SFF front)	8 SFF Chassis (upgradeable to 10 SFF front)
<b>Optical Drive</b>	None ship as standard	None ship as standard
<b>PCI-Express Slots</b>	1 PCIe x16 Primary Riser	1 PCIe x16 Primary Riser

## Pre-configured Models

<b>Power Supply</b>	1x 1000W HPE FlexSlot Power Supply <b>Notes: EU Lot-9 compliant.</b>	1x 1000W HPE FlexSlot Power Supply <b>Notes: EU Lot-9 compliant.</b>
<b>Fans</b>	7-standard fans	7- performance fans
<b>Management</b>	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
<b>Energy Star</b>	3.0 certified	3.0 certified
<b>Form Factor</b>	1U Rack	1U Rack
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.	3-year parts, 3-year labor, 3-year onsite support with next business day response.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = 421 EMEA
- xx1 = AA1 China

FARTAK SERVICE



### Configuration Information

#### Smart Templates from HPE

HPE is releasing new Smart Template technology in the One Config Advanced (OCA) configurator. These Templates represent the CTO equivalents of the top-selling BTO configurations. They are intended to provide simple starting points to assist you in easily creating and customizing your desired Server solutions. HPE Servers that have Platform Templates, developed by HPE Product Managers, will have a separate tab in the HPE OCA configurator.

#### Workload Solutions Templates from HPE

The Workload Solutions Templates build on the Smart Templates technology to easily develop working configurations of the most compelling Workload Solutions. The templates complement the Reference Builds developed by HPE. Workload Solutions templates preconfigure some of the key architecture decisions and make it easier for Sellers to get started and complete a differentiated server solution for your customer's specific workload.

#### Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to providing a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have high fulfillment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages, and better recovery dates. This platform has Mainstream SKUs in the options portfolio and is eligible for an improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

#### Mainstream Configurations

HPE is using the new Smart Templates technology to present Mainstream configurations. All the options in a Mainstream configuration are pre-selected Mainstream SKUs to optimize the performance, predictability, and fulfillment experience. Check the Template section in our configurators for eligible Mainstream configurations.

---

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

**Step 1: Base Configuration** (choose one (1) of the following configurable server models from the tables below)

### Configuration Information

CTO Server	HPE ProLiant DL325 Gen11 8SFF Configure-to-order Server	HPE ProLiant DL325 Gen11 4LFF Configure-to-order Server	HPE ProLiant DL325 Gen11 EDSFF Configure-to-order Server	HPE ProLiant DL325 Gen11 GPU Configure-to-order Server
<b>SKU Number</b>	P54199-B21	P54200-B21	P54201-B21	P54202-B21
<b>TAA SKU</b>	P54199-B21#GTA	P54200-B21#GTA	P54201-B21#GTA	P54202-B21#GTA
<b>HPE Trusted Supply Chain</b>	P36394-B21 - Optional			
<b>Processor</b>	Not included as standard	Not included as standard	Not included as standard	Not included as standard
<b>DIMM Slots</b>	12-DIMM slots	12-DIMM slots	12-DIMM slots	12-DIMM slots
<b>Storage Controller</b>	Choice of HPE storage controllers		Not supported	Not supported
<b>PCIe</b>	1 PCIe 5.0 x16 Primary Riser	1 PCIe 5.0 x16 Primary Riser	1 PCIe 5.0 x16 Primary Riser	3 PCIe 5.0 x16 Risers (Slot 1,4,5)
<b>OCP3.0 Slot</b>	2 PCIe 5.0 x8	2 PCIe 5.0 x8	2 PCIe 5.0 x8	2 PCIe 5.0 x8
<b>Drive Cage - included</b>	Not included	4 LFF	20 EDSFF E3.S 1T	Not included
<b>Network Controller</b>	Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters <b>Notes:</b> No embedded networking			
<b>Cooling</b>	Choice of Standard, Performance, or Closed-Loop Liquid Cooling Heat Sink Choice of Standard, Performance, or Liquid Cooling Fan Kit			
<b>Management</b>	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE GreenLake for Compute Ops Management (subscription included)			
<b>Video</b>	1 VGA rear			
<b>USB</b>	Front: 1 USB 3.2 Gen1 + iLO service port Rear: 2 USB 3.2 Gen1 Internal: 2 USB 3.2 Gen1			
<b>Security</b>	TPM2.0 (Trusted Platform Module) embedded <b>Notes:</b> Disabled on shipments to China			
<b>Rail Kit</b>	Optional Easy Install rails and CMA			
<b>Form Factor</b>	1U Rack			
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.			

#### Notes:

- HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- TAA compliant configuration requires TAA versions of the CTO Server SKUs.
- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL325 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. See "HPE Security" section within this document

## Configuration Information

for more detail and learn more at <http://www.hpe.com/security>

–All CTO servers are Energy Star 3.0 compliant.

CTO Server	8SFF CTO server	4LFF CTO server	EDSFF CTO server	GPU CTO server
<b>Included Drive Cage</b>	Not available	4 LFF drive cage	20 EDSFF Drive Cage	Not available
<b>Universal Media Bay</b>	1 Optional	Not Available	Not Available	Not available
<b>ODD</b>	1 Optional	1 Optional	Not Available	Not available
<b>4 LFF SAS/SATA</b>	Not Available	1 Optional	Not Available	Not available
<b>8 SFF SAS/SATA</b>	1 Optional	Not Available	Not Available	Not available
<b>8 SFF NVMe</b>	1 Optional	Not Available	Not Available	Not available
<b>2 SFF SAS/SATA</b>	1 Optional	Not Available	Not Available	Not available
<b>2 SFF NVMe</b>	1 Optional	Not Available	Not Available	Not available
<b>20 EDSFF NVMe</b>	Not Available	Not Available	1 Optional	Not available
<b>4 SFF NVMe</b>	Not Available	Not Available	Not Available	1 Optional
<b>8 EDSFF NVMe</b>	Not Available	Not Available	Not Available	1 Optional

### Notes:

- This applies to CTO configurations, field upgrades may differ depending on field configuration.
- Drive cage kits need to be ordered separately for the 8SFF CTO server and GPU CTO server.

## Step 2: Choose Core Options

- Choice of 1 Processor model and Heat Sink Kit

Requires necessary Heat Sink for different processor wattage.

- Choice of DDR5 memory options.

Requires necessary Fan Kits for different memory configurations and subjects to the recommended system ambient temperature.

- Choice of Drive cage, Storage Controllers, and Storage Controller Cables
- Choice of SSD, HDD, and Optical Drive
- Choice of OS Boot Devices
- Choice of Riser Cards
- Choice of Networking options

PCIe standup or OCP 3.0. Requires necessary Fan Kits and subjects to the recommended system ambient temperature.

- Choice of Accelerator options
- Choice of Power and Cooling options
- Choice of Security options
- Choice of Software as a Service Management - HPE GreenLake for Compute Ops Management and HPE OneView

## Configuration Information

### Step 3: Choose Additional Options

- Choice of Embedded Management
  - Choice of Rail Kits
  - Choice of Rack options
  - Choice of Support Services
- 

FARTAK SERVICE



### Core Options

#### Choice of Core Options

##### Processor

Please select one 4th Generation AMD EPYC Processor

- AMD EPYC 9124 3.0GHz 16-core 200W Processor for HPE
- AMD EPYC 9174F 4.1GHz 16-core 320W Processor for HPE
- AMD EPYC 9224 2.5GHz 24-core 200W Processor for HPE
- AMD EPYC 9254 2.9GHz 24-core 200W Processor for HPE
- AMD EPYC 9274F 4.05GHz 24-core 320W Processor for HPE
- AMD EPYC 9334 2.7GHz 32-core 210W Processor for HPE
- AMD EPYC 9354P 3.25GHz 32-core 280W Processor for HPE
- AMD EPYC 9374F 3.85GHz 32-core 320W Processor for HPE
- AMD EPYC 9454P 2.75GHz 48-core 290W Processor for HPE
- AMD EPYC 9474F 3.6GHz 48-core 360W Processor for HPE
- AMD EPYC 9534 2.45GHz 64-core 280W Processor for HPE
- AMD EPYC 9554P 3.1GHz 64-core 360W Processor for HPE
- AMD EPYC 9634 2.25GHz 84-core 290W Processor for HPE
- AMD EPYC 9654P 2.4GHz 96-core 360W Processor for HPE
- AMD EPYC 9734 2.2GHz 112-core 340W Processor for HPE
- AMD EPYC 9754 2.25GHz 128-core 360W Processor for HPE
- AMD EPYC 9684X 2.55GHz 96-core 400W Processor for HPE
- AMD EPYC 9384X 3.1GHz 32-core 320W Processor for HPE
- AMD EPYC 9184X 3.55GHz 16-core 320W Processor for HPE

- P53702-B2
- P53698-B2
- P58540-B2
- P53707-B2
- P53711-B2
- P53712-B2
- P53704-B2
- P53710-B2
- P53709-B2
- P53706-B2
- P53699-B2
- P53703-B2
- P53705-B2
- P53697-B2
- P60465-B2
- P60463-B2
- P63493-B2
- P63492-B2
- P63491-B2

##### Notes:

- Processors up to 240W require Standard Heat Sink (P58456-B21) and Standard Fan kit (P58461-B21).
  - o 9254 processor requires Performance Fan kit (P58462-B21) instead of Standard Fan kit.
- Processors more than 240W and less than or equal to 300W require Performance Heat Sink (P58457-B21) and Performance Fan kit (P58462-B21).
- Processors more than or equal to 320W require Closed-Loop Liquid Cooling Heat Sink (P58463-B21) and Liquid Cooling Fan kit (P59668-B21).
- If the processor less than or equal to 300W is selected along with EDSFF CTO Server, then Performance heat sink (P58457-B21) and Performance Fan kit (P58462-B21) must be selected.

#### Memory

Please select one or more memory from below.

For new DDR5 memory, please go to [HPE DDR5 Smart Memory QuickSpecs](#)

For details on the Memory Population Rules and Guidelines with AMD EPYC 9004 series processors, please go to: <https://www.hpe.com/psnow/doc/a50007481enw>

##### Notes:

- Quantity of memory DIMMs selected per socket must be 1, 2, 4, 6, 8, 10, or 12.
- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model

### Core Options

- HPE Server Memory compatibility for a specific server platform may vary or be limited within a server platform depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for an HPE server model or family and yet occasionally not be supported with some configurations within that server family.

#### Registered DIMMs (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50309-B21
HPE 32GB (1x32GB) Single Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50310-B21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50311-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50312-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P50313-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P50314-B21

#### Notes:

- Mixing of x4 memory and x8 memory is not supported
- Mixing of 3DS memory and non-3DS memory is not supported.
- Supported memory configuration and recommended system ambient temperature:

Memory	SFF/LFF/GPU* CTO server			EDSFF CTO server	
	Std Fans (P58461-B21)	Perf Fans (P58462-B21)	LC Fans (P59668-B21)	Perf Fans (P58462-B21)	LC Fans (P59668-B21)
<= 64GB DIMM (P50309-B21, P50310-B21, P50311-B21, P50312-B21)				25C	25C
128GB DIMM (P50313-B21)	Not Support		25C	25C	25C Max = 8
256GB DIMM (P50314-B21)	Not Support	25C	25C Max = 4	25C	Not Support

#### Notes:

- Blank = no limitation.
- Not Support = Configuration not allowed because of thermal limitation.
- Requires Performance or Liquid Cooling Fan Kit for both 128GB and 256GB DIMMs.
- Max=4 of 256GB DIMM memory can be selected if the Liquid Cooling Heat Sink/ Liquid Cooling Fan Kit is selected.
- Max=8 of 128GB DIMM memory can be selected if the Liquid Cooling Heat Sink/ Liquid Cooling Fan Kit is selected along with the EDSFF CTO server.
- \*Require performance fans or liquid cooling fans for GPU CTO server

### Storage

### Core Options

#### Drive cages

##### Notes:

- For the 8SFF CTO server, If 8SFF Backplane is not selected then Internal Controllers, Controller cables and Drives must not be allowed for selection. This config will be shipped as a driveless config.
- Maximum one(1) 2SFF backplane kits can be selected together with 8SFF backplane kit, to support up to 10SFF in total.
- The type of drives that each drive cage supports are listed in the below table.

PN	Description	SATA	SAS	NVMe U.3 Static SSD	NVMe U.3 SSD	NVMe U.2 SSD
P54999-B21	HPE DL325 Gen11 8SFF x1 TM BP Kit	X	X	X	X	Not Support
P55000-B21	HPE DL325 Gen11 8SFF x4 TM BP Kit	X	X	X	X	Not Support
P56652-B21	HPE DL325 Gen11 2SFF x4 TM BP Kit	X	X	X	X	Not Support
P64521-B21	HPE DL325 Gen11 4SFF x4 NVMe Kit	X	X	X	X	Not Support

HPE ProLiant DL325 Gen11 8SFF x1 Tri-Mode U.3 Backplane Kit

P54999-B21

##### Notes:

- Supports 8 SFF SAS/SATA/ NVMe (U.3) Basic Carrier (BC) Drives.
- This drive cage can only be selected with 8SFF CTO Server.
- Max = 1.
- Requires Tri-Mode controllers if NVMe u.3 drives are selected with this backplane kit.
- if this Backplane kit is selected then one of the following cable options is supported:
  - o with PCIe controllers: 8SFF x1 Tri-Mode Secondary Cable Kit (P57009-B21).
  - o with OCP controllers: 8SFF x1 OCP2 Tri-Mode Cable Kit (P59619-B21).
  - o SATA direct attach: no cable kit selection required.

HPE ProLiant DL325 Gen11 8SFF x4 Tri-Mode U.3 BC Backplane Kit

P55000-B21

##### Notes:

- Supports 8 SFF SAS/SATA/ NVMe (U.3) Basic Carrier (BC) Drives.
- This drive cage can only be selected with 8SFF CTO Server.
- Max = 1.
- Requires Tri-Mode controllers if SAS/SATA SFF drives are selected with this backplane kit.
- if this 8SFF x4 U.3 Backplane kit is selected then one of the following cable options is supported:
  - o with SR932i-p: 8SFF x4 Primary SR932i-p Tri-Mode Cable Kit (P57004-B21) or 8SFF x4 Secondary SR932i-p Tri-Mode Cable Kit (P57005-B21).
  - o with PCIe controllers: 8SFF x2 Tri-Mode Secondary Cable Kit (P57006-B21).
  - o with OCP controllers: 8SFF x2 Tri-Mode OCP2 Cable Kit (P57008-B21).
  - o NVMe direct attach: no cable kit selection required.

### Core Options

- Requires Performance Fan Kit (P58462-B21) or Liquid Cooling Fan Kits (P59668-B21).

HPE ProLiant DL325 Gen11 2SFF x4 Tri-Mode U.3 BC Backplane Kit

P56652-B21

#### Notes:

- Supports 2 SFF SAS/SATA/ NVMe (U.3) Basic Carrier (BC) Drives.
- This drive cage can only be selected with 8SFF CTO Server.
- Max = 1.
- If this 2SFF U.3 Backplane kit is selected then one of the following cable options is supported:
  - o with PCIe controllers: 2SFF x4 Secondary Tri-Mode Cable Kit (P59621-B21).
  - o with OCP controllers: 2SFF x4 OCP2 Tri-Mode Cable Kit (P59620-B21).
  - o NVMe direct attach: no cable kit selection required.
  - o SATA direct attach: 2SFF SATA Direct Attach Cable Kit (P59617-B21).

- Requires 8SFF x1 U.3 Backplane Kit (P54999-B21) or 8SFF x4 U.3 Backplane Kit (P55000-B21) in the order.

- If this drive cage is selected then optical drives (726536-B21 & 726537-B21) cannot be selected.

HPE ProLiant DL325 Gen11 4SFF x4 NVMe Drive Cage Kit

P64521-B21

#### Notes:

- Supports 4 SFF NVMe (U.3) Basic Carrier (BC) Drives direct attach. No additional cable kit selection required
- This drive cage can only be selected with GPU CTO Server.
- Max = 1.

HPE ProLiant DL325 Gen11 8EDSFF x4 Drive Cage Kit

P64522-B21

#### Notes:

- Supports 8 EDSFF NVMe Drives direct attach. No additional cable kit selection required
- This drive cage can only be selected with GPU CTO Server.
- Max = 1.

---

### Storage Controller

The Gen11 storage controller portfolio has been updated to include new technology like OCP3.0 as well as PCIe adapters. For a more detailed breakout of the available Gen11 controllers visit the storage controllers QuickSpecs site:

[HPE Compute MR Gen11 Controllers Quick Spec](#)

[HPE Compute SR Gen11 Controllers Quick Spec](#)

#### Notes:

- When selecting SR RAID controllers for external storage (E208e-p, 804398-B21) and MR RAID controllers for internal storage, please be aware these two products use different RAID configuration tools.
- Mixing of MR (MegaRAID) series controllers and SR (SmartRAID) series controllers is not allowed.

### Core Options

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller

804398-B2

**Notes:**

- This controller supports up to 8 SAS/SATA Drives (external).
- Controller Based Encryption (CBE) with a remote key management server is not supported. Local key management(LKM) is supported.
- One Button Secure Erase (OBSE) used to sanitize drives and factory reset the controller is not supported.

HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller

P47789-B2

**Notes:**

- This controller supports up to 16 SAS/SATA/NVMe Drives.

HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller

P58335-B2

**Notes:**

- This controller supports up to 8 SAS/SATA/NVMe Drives.
- Requires 96W Smart Stg Li-ion Batt 145mm Kit (P01366-B21) or Smart Hybrid Capacitor w/ 145mm Cbl (P02377-B21).

HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller

P47781-B2

**Notes:**

- This controller supports up to 16 SAS/SATA/NVMe Drives.
- Requires 96W Smart Stg Li-ion Batt 145mm Kit (P01366-B21) or Smart Hybrid Capacitor w/ 145mm Cbl (P02377-B21).

HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller

P47785-B2

**Notes:** This controller supports up to 16 SAS/SATA/NVMe Drives.

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller

P47777-B2

**Notes:**

- This controller supports up to 16 SAS/SATA/NVMe Drives.
- Requires 96W Smart Stg Li-ion Batt 145mm Kit (P01366-B21) or Smart Hybrid Capacitor w/ 145mm Cbl (P02377-B21).

HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage Controller

P47184-B2

**Notes:**

- This controller supports up to 32 SAS/SATA/NVMe Drives.
- Requires 96W Smart Stg Li-ion Batt 145mm Kit (P01366-B21) or Smart Hybrid Capacitor w/ 145mm Cbl (P02377-B21).

### Core Options

#### Battery and Hybrid Capacitor

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit P02377-B2

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit P01366-B2

HPE ProLiant DL325 Gen11 Megacell Extension Cable Kit P56659-B2

#### Notes:

- If HPE 96W Smart Stg Li-ion Batt 145mm Kit is selected then HPE Smart Hybrid Capacitor 145mm kit cannot be selected and vice versa.
- If M.2 enablement Kit and "96W Smart Stg Li-ion Batt 145mm Kit OR Smart Hybrid Capacitor w/ 145mm Kit" are selected then Megacell Ext Cbl Kit must be selected.

#### Storage Controller Cables

HPE ProLiant DL325 Gen11 8SFF x4 Primary SR932i-p Tri-Mode Cable Kit P57004-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to SR932i-p controllers at the primary riser slot with up to x4 speed.

HPE ProLiant DL325 Gen11 8SFF x4 Secondary SR932i-p Tri-Mode Cable Kit P57005-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to SR932i-p controllers at the secondary riser slot with up to x4 speed.

HPE ProLiant DL325 Gen11 8SFF x2 Secondary Tri-Mode Cable Kit P57006-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at primary riser slot with x2 speed.

HPE ProLiant DL325 Gen11 8SFF x2 OCP2 Tri-Mode Cable Kit P57008-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at OCP22 slot with x2 speed.

HPE ProLiant DL325 Gen11 8SFF x1 Secondary Tri-Mode Cable Kit P57009-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at secondary riser slot with x1 speed.

HPE ProLiant DL325 Gen11 8SFF x1 OCP2 Tri-Mode Cable Kit P59619-B2

**Notes:** supports 8 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at OCP22 slot with x1 speed.

HPE ProLiant DL325 Gen11 2SFF SATA Direct Attach Cable Kit P59617-B2

**Notes:** supports 2 SFF SATA direct attach.

HPE ProLiant DL325 Gen11 2SFF x4 OCP2 Tri-Mode Cable Kit P59620-B2

**Notes:** supports 2 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at OCP22 slot with up to x4 speed.

HPE ProLiant DL325 Gen11 2SFF x4 Secondary Tri-Mode Cable Kit P59621-B2

**Notes:** supports 2 SFF U.3 SAS/SATA/NVMe connecting to storage controllers at secondary riser slot with up to x4 speed.

HPE ProLiant DL325 Gen11 20EDSFF x2 NVMe Direct Attach Cable Kit P57010-B2

#### Notes:

- Supports 20 EDSFF E3.S 1T NVMe direct attach with x2 speed.
- If CD7 EDSFF drives are selected then this 20EDSFF x2 Direct attach cable cannot be selected and vice versa.

## Core Options

### Supported Storage Configurations

Drives					Backplane		Supported Controller		Cable kit		
Type	Max Qty	SAS	SATA	U.3 NVMe	EDSFF	Box1 4LFF/ 8SFF/ 20EDSFF	Box2 2SFF	Box1 4LFF/ 8SFF/ 20EDSFF	Box2 2SFF	Box1 4LFF/ 8SFF/ 20EDSFF	Box2 2SFF
LFF	4		4			Included in CTO		Direct Attach (SATA)		Included	
LFF	4	4	4			Included in CTO		MR416i-o/MR408i-o/MR216i-o		Included	
SFF	8		8			P54999-B21		Direct Attach (SATA)		Included	
SFF	8	8	8			P54999-B21		MR416i-o/MR408i-o/MR216i-o		P59619-B21	
SFF	8	8	8			P54999-B21		SR932i-p/MR416i-p/MR216i-p		P57009-B21	
SFF	8		8			P55000-B21		Direct Attach (NVMe x2)		Included	
SFF	8	8	8			P55000-B21		SR932i-p		P57004-B21	
SFF	8	8	8			P55000-B21		SR932i-p		P57005-B21	
SFF	8	8	8			P55000-B21		SR932i-p/MR416i-p/MR216i-p		P57006-B21	
SFF	8	8	8			P55000-B21		MR416i-o/MR408i-o/MR216i-o		P57008-B21	
SFF	10		8	2		P54999-B21	(P56652-B21)	Direct Attach (SATA)	Direct Attach (NVMe x4)	Included	Included
SFF	10		10			P54999-B21	(P56652-B21)	Direct Attach (SATA)	Direct Attach (SATA)	Included	P59617-B21
SFF	10	2	10	2		P54999-B21	(P56652-B21)	Direct Attach (SATA)	MR408i-o	Included	P59620-B21
SFF	10	8	8	10		P54999-B21	(P56652-B21)	MR408i-o	Direct Attach (NVMe x4)	P59619-B21	Included
SFF	10	8	10	8		P54999-B21	(P56652-B21)	MR408i-o	Direct Attach (SATA)	P59619-B21	P59617-B21
SFF	10	10	10	10		P54999-B21	(P56652-B21)	MR408i-o	SR932i-p/MR416i-p/MR216i-p	P59619-B21	P59621-B21
SFF	10	10	10	10		P54999-B21	(P56652-B21)	MR416i-o/MR216i-o		P59619-B21	P59620-B21
SFF	10	10	10	10		P54999-B21	(P56652-B21)	SR932i-p/MR416i-p/MR216i-p		P57009-B21	P59621-B21
SFF	10		8	10		P55000-B21	(P56652-B21)	Direct Attach (NVMe x4)	Direct Attach (NVMe x4)	Included	Included
SFF	10		10	8		P55000-B21	(P56652-B21)	Direct Attach (NVMe x4)	Direct Attach (SATA)	Included	P59617-B21
SFF	10	2	10	10		P55000-B21	(P56652-B21)	Direct Attach (NVMe x4)	MR416i-p	Included	P59621-B21
SFF	10	2	10	10		P55000-B21	(P56652-B21)	Direct Attach (NVMe x4)	MR416i-o	Included	P59620-B21
SFF	10	10	10	10		P55000-B21	(P56652-B21)	SR932i-p	MR416i-o/MR408i-o/MR216i-o	P57004-B21	P59620-B21
SFF	10	8	8	10		P55000-B21	(P56652-B21)	SR932i-p	Direct Attach (NVMe x4)	P57004-B21	Included
SFF	10	8	10	8		P55000-B21	(P56652-B21)	SR932i-p	Direct Attach (SATA)	P57004-B21	P59617-B21
SFF	10	10	10	10		P55000-B21	(P56652-B21)	SR932i-p	MR416i-o/MR408i-o/MR216i-o	P57005-B21	P59620-B21
SFF	10	8	8	10		P55000-B21	(P56652-B21)	SR932i-p	Direct Attach (NVMe x4)	P57005-B21	Included
SFF	10	8	10	8		P55000-B21	(P56652-B21)	SR932i-p	Direct Attach (SATA)	P57005-B21	P59617-B21
SFF	10	10	10	10		P55000-B21	(P56652-B21)	SR932i-p		P57006-B21	P59621-B21
SFF	10	10	10	10		P55000-B21	(P56652-B21)	MR416i-o/MR408i-o/MR216i-o	MR416i-p/MR216i-p	P57008-B21	P59621-B21
SFF	10	10	10	10		P55000-B21	(P56652-B21)	MR416i-p/MR216i-p	MR416i-o/MR408i-o/MR216i-o	P57006-B21	P59620-B21
EDSFF	20			20		Included in CTO		Direct Attach (NVMe x4)		Included	
EDSFF	20			20		Included in CTO		Direct Attach (NVMe x2)		P57010-B21	

**Included** = Included with CTO server or Drive Cage

## HPE Drives

### Solid State Drives

For SSD selection guidance, please visit <https://ssd.hpe.com/>

#### Read Intensive - 12G SAS - SFF

- HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD
- HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD
- HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD
- HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD
- HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD
- HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD
- HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD
- HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD

- P40506-B21
- P40507-B21
- P40508-B21
- P40509-B21
- P49031-B21
- P49035-B21
- P49041-B21
- P49045-B21

#### Read Intensive - 12G SAS - LFF

### Core Options

HPE 7.68TB SAS 24G Read Intensive LFF LPC Multi Vendor SSD	P49040-B2
<b>Mixed Use - 12G SAS - SFF</b>	
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B2
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B2
HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B2
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B2
HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B2
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B2
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B2
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B2
<b>Mixed Use - 12G SAS- LFF</b>	
HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	P37009-B2
<b>Read Intensive - 6G SATA - SFF</b>	
HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B2
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B2
HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B2
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B2
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B2
HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B2
HPE 480GB SATA 6G Read Intensive SFF BC PM893 SSD	P44007-B2
HPE 960GB SATA 6G Read Intensive SFF BC PM893 SSD	P44008-B2
HPE 1.92TB SATA 6G Read Intensive SFF BC PM893 SSD	P44009-B2
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893 SSD	P44010-B2
<b>Mixed Use - 6G SATA - SFF</b>	
HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B2
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B2
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B2
HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B2
HPE 480GB SATA 6G Mixed Use SFF BC PM897 SSD	P44011-B2
HPE 960GB SATA 6G Mixed Use SFF BC PM897 SSD	P44012-B2
HPE 1.92TB SATA 6G Mixed Use SFF BC PM897 SSD	P44013-B2
<b>Very Read Optimized - 6G SATA - SFF</b>	
HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD	P58228-B2
<b>Read Intensive - 6G SATA - LFF</b>	
HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	P47808-B2
<b>Very Read Optimized - 6G SATA - LFF</b>	
HPE 7.68TB SATA 6G Very Read Optimized LFF LPC 5400 SSD	P58232-B2
<b>Read Intensive - NVMe - SFF</b>	
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B2
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-B2
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B2
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B2
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47844-B2

### Core Options

HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47845-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47846-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47847-B21
<b>Mixed Use - NVMe - SFF</b>	
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47837-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47838-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47839-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47840-B21
<b>SED (Self-Encryption Drive) - SATA- SFF</b>	
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58248-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58240-B21
<b>SED (Self-Encryption Drive) - NVMe- SFF</b>	
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41404-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41405-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41402-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41403-B21
<b>Read Intensive - NVMe - EDSFF E3.S 1T</b>	
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56585-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56586-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD	P56587-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57799-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57803-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF PM1743 SSD	P57807-B21
<b>Hard Disk Drive</b>	
<b>Enterprise - 12G SAS - SFF Drives</b>	
HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P28028-B21
HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P28352-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P28586-B21
HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P40430-B21
HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P40432-B21

### Core Options

HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P53560-B21
HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P53561-B21
HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P53562-B21
<b>Midline - 12G SAS - SFF Drives</b>	
HPE 2TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD	P28505-B21
HPE 1TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty HDD	P53563-B21
<b>Midline - 12G SAS - LFF Drives</b>	
HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881781-B21
HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	P09155-B21
HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834031-B21
HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833926-B21
HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833928-B21
HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861746-B21
HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23608-B21
HPE 18TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P37669-B21
HPE 10TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD	P53556-B21
HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53553-B21
<b>Midline - 6G SATA - SFF Drives</b>	
HPE 1TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty HDD	P28610-B21
HPE 2TB SATA 6G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD	P28500-B21
<b>Midline - 6G SATA - LFF Drives</b>	
HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861681-B21
HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861683-B21
HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861686-B21
HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881787-B21
HPE 14TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	P09165-B21
HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834028-B21
HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861742-B21
HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23449-B21
HPE 18TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P37678-B21
HPE 10TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e ISE Multi Vendor HDD	P53557-B21
HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53554-B21
<b>SED (Self-Encryption Drive)</b>	
HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD	P28618-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Self-encrypting FIPS HDD	P28622-B21

### Core Options

#### Optical Drive

HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21
HPE Mobile USB DVD-RW Optical Drive	701498-B21
HPE ProLiant DL325 Gen11 8SFF Display Port/USB/Optical Drive Blank Kit	P56654-B21
HPE ProLiant DL325 Gen11 4LFF Display Port/USB/Optical Drive Blank Kit	P56655-B21

#### Notes:

- If the 2SFF drive cage (P56652-B21) is selected then optical drives cannot be selected and vice versa.
- If the optical drive is selected along with the 8SFF CTO server (P54199-B21), then the 8SFF ODD blank kit (P56654-B21) must be selected.
- If the optical drive is selected along with the 4LFF CTO server (P54200-B21), then the 4LFF ODD blank kit (P56655-B21) must be selected.
- Both 8SFF ODD blank kit (P56654-B21) and 4LFF ODD blank kit (P56655-B21) support one (1) Display Port and one (1) USB 2.0 port.

### Boot Controllers

HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device	P48183-B21
--	------------

#### Notes:

- RAID 1 is preconfigured on this option and additional RAID cannot be applied on this Boot Device
- Requires Performance Fan Kits (P58462-B21) or Liquid Cooling Fan Kits (P59668-B21)
- If this NS204i-u boot device is selected along with the SFF/LFF CTO servers and Liquid Cooling Fan Kits, then the 2SFF drive cage (P56652-B21) cannot be selected, and recommended system ambient temperature is 25C.
- Not allowed If this NS204i-u boot device is selected along with the EDSFF CTO servers and Liquid Cooling Fan Kit.
- If this NS204i-u boot device is selected then the Secondary Low Profile riser (P55029-B21) and NS204i-u Cable Kit (P57013-B21) must be selected.
- For additional information, please visit [HPE OS Boot Device QuickSpecs](#)

HPE ProLiant DL3X5 Gen11 NS204i-u NVMe Hot Plug Boot Device Cable Kit	P57013-B21
HPE ProLiant DL325 Gen11 NVMe/SATA M.2 Enablement Kit	P57014-B21

#### Notes:

- Requires two (2) M.2 SSD Drives In the same interface (SATA or NVMe).
- No RAID is supported on this M.2 enablement kit.
- If this M.2 enablement kit is selected along with the SFF/LFF CTO servers and Liquid Cooling Fan Kit (P59668-B21), then the 2SFF drive cage (P56652-B21) cannot be selected and recommended system ambient temperature is 25C.
- Not allowed If this M.2 enablement kit is selected along with the EDSFF CTO servers and Liquid Cooling Fan Kit.

### Read Intensive - 6G SATA - M.2 - Solid State Drives

HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD	P47817-B21
HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD	P47818-B21

### Risers

### Core Options

**Notes:** The Primary riser shipping default in the CTO server is PCIe Gen5 x16 FH HL.

HPE ProLiant DL3X5 Gen11 1U x16 Low Profile Secondary Riser Kit	P55029-B21
HPE ProLiant DL3X5 Gen11 1U x16 Riser Kit	P56915-B21

**Notes:**

- Both riser kits are in the secondary slot.
- Requires Low Profile Secondary riser kit if NS204i-u (P48183-B21) is selected.

HPE ProLiant DL325 Gen11 FHFL Add-on Cards Support Kit	P64520-B21
--	------------

**Notes:** this kit supports single-width FHFL add-on PCIe cards at the primary riser position

### HPE Networking

**Notes:** Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://h20195.www2.hpe.com/v2/getpdf.aspx/A00002507ENW.pdf>

#### PCIe Adapters

##### 1 Gigabit Ethernet adapter

Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P21106-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P51178-B21

##### 10 Gigabit Ethernet adapters

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE	P26253-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE	P26259-B21

##### 10/25 Gigabit Ethernet adapters

**Notes:** Require Performance Fan Kits (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P26264-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P42044-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21

##### 100/200 Gigabit Ethernet adapters

**Notes:** Require Performance Fan Kits (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE	P21112-B21
Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE	P10180-B21

##### 100 Gigabit Storage Offload Adapter

**Notes:** Require Performance Fan Kits (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature

HPE NV60100M 100Gb 2-port Storage Offload Adapter	R8M41A
---	--------

##### 200/400 Gigabit Slingshot Adapters

HPE Slingshot SA210S Ethernet 200Gb 1-port PCIe NIC	R4K46A
---	--------

### Core Options

#### Notes:

- Can only be selected or configured for a Cray or Slingshot Solution. Not allowed for a Non-Cray or Non- Slingshot Solution
- Cannot have the following networking options configured within the same server:  
Slingshot 11 or Slingshot 22.

#### OCP 3.0 Adapter

##### 1 Gigabit Ethernet OCP adapters

Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21

##### 10 Gigabit Ethernet OCP Adapters

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21

##### 10/25 Gigabit Ethernet OCP adapters

**Notes:** Require Performance Fan Kits (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P26269-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21

##### 100/200 Gigabit Ethernet adapters

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21
--	------------

#### Notes:

- Require Performance Fan Kits (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature
- Requires OCP1 upgrade cable kit (P56658-B21) to support PCIe Gen5 x16 bandwidth on OCP21 slot

### Recommended System Ambient Temperature

P/N	SFF/LFF CTO servers				EDSFF CTO server			
	Perf Fans (P58462-B21)		LC Fans (P59668-B21)		Perf Fans (P58462-B21)		LC Fans (P59668-B21)	
	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser
P08443-B21						25C	25C	Not support
P26264-B21		25C		25C		Not support	25C	Not support
P42044-B21		25C		25C		Not support	25C	Not support
P08458-B21		25C		25C		Not support	25C	Not support
P21112-B21		25C		25C		Not support	25C	Not support
P10180-B21		Not support	25C	Not support		Not support	Not support	Not support

### Core Options

P25960-B21		Not support	25C	Not support		Not support	Not support	Not support
R8M41A		Not support	25C	Not support		Not support	Not support	Not support
<b>P/N</b>	<b>OCP21</b>	<b>OCP22</b>	<b>OCP21</b>	<b>OCP22</b>	<b>OCP21</b>	<b>OCP22</b>	<b>OCP21</b>	<b>OCP22</b>
P10106-B21		25C		25C		25C	25C	Not support
P42041-B21		25C		25C		Not support	Not support	Not support
P26269-B21		Not support		Not support		Not support	Not support	Not support
P22767-B21		Not support		Not support		Not support	Not support	Not support

<b>GPU CTO server*</b>				
<b>P/N</b>	<b>Perf Fans (P58462-B21)</b>		<b>LC Fans (P59668-B21)</b>	
	<b>Pri. Riser</b>	<b>Sec. Riser</b>	<b>Pri. Riser</b>	<b>Sec. Riser</b>
P08443-B21		25C		25C
P26264-B21		Not support	25C	Not support
P42044-B21		Not support	25C	Not support
P08458-B21		Not support	25C	Not support
P21112-B21		Not support	25C	Not support
P10180-B21		Not support	Not support	Not support
P25960-B21		Not support	Not support	Not support
R8M41A		Not support	Not support	Not support
<b>P/N</b>	<b>OCP21</b>	<b>OCP22</b>	<b>OCP21</b>	<b>OCP22</b>
P10106-B21		25C		25C
P42041-B21		25C		25C
P26269-B21		Not support	25C	Not support
P22767-B21		Not support	25C	Not support

#### Notes:

- Blank = no limitation
- Not support = configuration not allowed because of thermal limitation.
- The thermal condition of GPU CTO server is based on 2pcs 72W GPUs installed at the front cage.

### HPE InfiniBand

#### Notes:

- Requires Performance Fan Kit (P58462-B21) or Liquid Cooling fan kits (P59668-B21) and subject to the recommended system ambient temperature
- Requires OCP upgrade cable kit (P56658-B21) for 200Gb OCP adapters (P31323-B21 or P31348-B21)
- For more information, please visit: [HPE InfiniBand Options for HPE ProLiant and Apollo Servers](#)

HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter

P23665-B21

### Core Options

HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter	P23666-B21
HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 MCX653105A-HDAT Adapter	P23664-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter	P31324-B21
HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 OCP3 MCX653435A-HDAI Adapter	P31323-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter	P31348-B21
HPE InfiniBand NDR 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-B21
HPE InfiniBand NDR200 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter	P45642-B21

### Recommended System Ambient Temperature

P/N	SFF/LFF CTO servers				EDSFF CTO server			
	Perf Fans (P58462-B21)		LC Fans (P59668-B21)		Perf Fans (P58462-B21)		LC Fans (P59668-B21)	
	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser
P23665-B21						25C	25C	Not support
P23664-B21		25C		25C		Not support	25C	Not support
P23666-B21		25C		25C		Not support	25C	Not support
P31324-B21		Not support	25C	Not support		Not support	Not support	Not support
P45641-B21		Not support	25C	Not support		Not support	Not support	Not support
P45642-B21		Not support	25C	Not support		Not support	Not support	Not support
P/N	OCP21	OCP22	OCP21	OCP22	OCP21	OCP22	OCP21	OCP22
P31323-B21		Not support	25C	Not support	25C	Not support	Not support	Not support
P31348-B21		Not support	Not support	Not support	Not support	Not support	Not support	Not support

P/N	GPU CTO server*			
	Perf Fans (P58462-B21)		LC Fans (P59668-B21)	
	Pri. Riser	Sec. Riser	Pri. Riser	Sec. Riser
P23665-B21		25C		25C
P23664-B21		Not support	25C	Not support
P23666-B21		Not support	25C	Not support
P31324-B21		Not support	Not support	Not support
P45641-B21		Not support	Not support	Not support
P45642-B21		Not support	Not support	Not support
P/N	OCP21	OCP22	OCP21	OCP22
P31323-B21	25C	Not support	Not support	Not support
P31348-B21	25C	Not support	Not support	Not support

## Core Options

**Notes:**

- Blank = no limitation
- Not support = configuration not allowed because of thermal limitation.
- The thermal condition of GPU CTO server is based on 2pcs 72W GPUs installed at the front cage.

**Accelerators**

NVIDIA A2 16GB PCIe Non-CEC Accelerator for HPE R9H23C

**Notes:**

- This is a PCIe Gen4 x 8 single-width HHHL GPU card.
- Max = 2
- This GPU can only be selected with 8SFF/4LFF/EDSFF CTO Server.
- If this GPU is installed in PCIe Slot2 with Performance Fan kits (P58462-B21), the recommended system ambient temperature is 25C.
- If this GPU is installed on either PCIe Slot1 or Slot2 with Liquid Cooling Fan kits (P59668-B21), the recommended system ambient temperature is 25C.

NVIDIA L4 24GB PCIe Accelerator for HPE S0K89C

**Notes:**

- This is a PCIe Gen4 x 16 single-width HHHL GPU card.
- Max = 2
- This GPU can only be selected with GPU CTO Server.
- If this GPU is installed in PCIe Slot2 with Performance Fan kits (P58462-B21), the recommended system ambient temperature is 25C.
- This GPU cannot be selected with Liquid Cooling Fan kits (P59668-B21) on either PCIe Slot1 or Slot2 due to thermal limitation.

## HPE Storage Options

**Emulex Fibre Channel HBAs**

HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A
HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter	R7N77A
HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter	R7N78A

**QLogic Fibre Channel HBAs**

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A

## Power and Cooling

**Cooling**

**Notes:** Require one (1) Heat Sink and Seven (7) Fan Kit in the order.

HPE ProLiant DL3X5 Gen11 CPU Standard 1U Heat Sink Kit P58456-B21

### Core Options

**Notes:** Required For processors less than or equal to 240W

HPE ProLiant DL3X5 Gen11 CPU Performance 1U Heat Sink Kit P58457-B21

**Notes:** Required for For processors more than or equal to 260W and less than or equal to 300W

HPE ProLiant DL325 Gen11 Closed-loop Liquid Cooling FIO Heat Sink Kit P58463-B21

**Notes:**

- This Closed-loop liquid cooling Heat Sink FIO kit is designed for processors more than or equal to 320W.
- Requires Liquid Cooling Fan Kits (P59668-B21).
- The HPE DL325 Gen11 Closed-Loop Liquid Cooling Heat Sink FIO kit is subject to a Maximum Usage Limitation of not exceeding five (5) years of operation and is required to be replaced when reaching limitation. Parts and components that Hewlett Packard Enterprise determines have reached or exceeded their Maximum Usage limitations will not be provided, repaired, or replaced under warranty or service contract. Contact your local sales representative for additional information.

HPE ProLiant DL3XX Gen11 1U Standard Fan Kit P58461-B21

HPE ProLiant DL3XX Gen11 1U Performance Fan Kit P58462-B21

**Notes:**

- Required for both EDSFF and GPU CTO servers.
- Required if any of the below options are selected with 8SFF/4LFF CTO server
  - o 8SFF x4 U.3 backplane kit (P55000-B21)
  - o 2SFF x4 U.3 backplane kit (P56652-B21)
  - o 10 NVMe/SAS drives selected in the order.
  - o Networking options: 10/25G, 100/200G, and Infiniband options.
  - o Graphic options
  - o NS204i-u and M.2 enablement kit

HPE ProLiant DL325 Gen11 Liquid Cooling Fan Kit P59668-B21

**Notes:** If Closed-loop Liquid Cooling Heat Sink (P58463-B21) is selected then this fan kit must be selected.

Cooling options summary - SFF and LFF CTO servers			
CPU TDP	<= 240W	260W - 300W	>= 320 W
Heatsink	Standard (P58456-B21)	Performance (P58457-B21)	Closed-Loop Liquid Cooling (P58436-B21)
(7) Fans	Standard (P58461-B21)	Performance (P58462-B21)	Liquid Cooling (P59668-B21)

## Core Options

Cooling options summary - EDSFF CTO server			
CPU TDP	<= 300W		>= 320 W
Heatsink	Performance (P58457-B21)		Closed-Loop Liquid Cooling (P58436-B21)
(7) Fans	Performance (P58462-B21)		Liquid Cooling (P59668-B21)
Cooling options summary - GPU CTO server			
CPU TDP	<= 240W	260W - 300W	>= 320 W
Heatsink	Standard (P58456-B21)	Performance (P58457-B21)	Closed-Loop Liquid Cooling (P58436-B21)
(7) Fans	Performance (P58462-B21)		Liquid Cooling (P59668-B21)

### Notes:

- Recommended system ambient temperature is 27C if the 4LFF CTO server, a Standard Heat Sink, and seven (7) Standard Fan Kits are selected.
- Recommended system ambient temperature is 25C for the EDSFF CTO server in all cooling configurations.
- Recommended system ambient temperature is 25C if the seven (7) liquid cooling Fan Kits are selected with GPU CTO server

## Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, and tool-less installation into HPE ProLiant Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

### Notes:

- Select a minimum (1), maximum (2) power supplies
- All power supplies in a server should match. Mixing Power Supplies is not supported.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).
- Before making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <https://poweradvisorex.it.hpe.com/?Page=Index>

– HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE Power Cords and Cables](#) for a full list of optional power cords

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

**Notes:** Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit P38995-B21

**Notes:** Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

**Notes:** For EMEA Region: Commission Regulation (EU) 2019/424 laying down ecodesign requirements for servers and data-storage products applies from

### Core Options

1 March 2020. A more stringent (compared to the currently applicable values) value for the minimum power efficiency at 96% of PSUs will apply latest from, 1 January 2024, after deferral. For more details, please refer to Lot9 enforcement deferral notice "European Union law Document 52022XC1209 (01)"

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit

P17023-B21

#### Notes:

- Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.
- HPE 1600W DC PSU Power Lug Option Kit (P36877-B21) must be selected along with this power supply.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38997-B21

#### Notes:

- Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- The power supply selected only supports high line voltage (200VAC to 240VAC)

HPE 1600W -48VDC Power Cable Lug Kit

P36877-B21

**Notes:** Must be selected along with HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit (P17023-B21)

---

### HPE Security

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

#### Notes:

- HPE Trusted Supply Chain is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL325 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. Learn more at <http://www.hpe.com/security>
- This option requires the selection of HPE Gen11 Intrusion Detection Kit (P48922-B21)
- This option requires the selection of either HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A) or HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features (512485-B21)
- This option is limited to stand-alone DL325Gen11 CTO servers only. The HPE Trusted Supply Chain configuration will not be available if the server is ordered as factory integrated into a rack
- One instance of the following Electronic License to Use is required per order (not per server): R6X85AAE (HPE Trusted Supply Chain E-LTU)
- This option cannot be selected with TAA instruction SKU or TAA CTO Models.

HPE ProLiant DL3XX Gen11 Intrusion Cable Kit

P48922-B21

**Notes:** This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving distribution, and operation.

HPE ProLiant DL3X5 Gen11 1U Common Bezel Kit

P50450-B21

### Core Options

HPE Bezel Lock Kit 875519-B21

**Notes:** The Bezel lock kit (875519-B21) must be selected with the bezel kit (P50450-B21)

HPE iLO Common Password FIO Setting P08040-B21

**Notes:**

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

### Additional Cable Options

HPE ProLiant DL3X5 Gen11 OCP1 Upgrade Cable Kit P56658-B21

**Notes:** Supports PCIe x16 bandwidth at OCP slot 21. Required if one of the following options is in the order

- OCP InfiniBand network adapters (P31323-B21, P31348-B21)
- BCM 57504 10/25GbE 4p SFP28 Adaptor (P26269-B21)
- Intel E810 100GbE 2p QSFP28 OCP3 Adptr (P22767-B21)

HPE ProLiant DL3X5 Serial Port Enablement Kit P50887-B21

**Notes:** This cable kit supports an optional serial port at the rear of the server.

### Software as a Service Management

#### HPE GreenLake for Compute Ops Management

##### Base SKU

HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS R7A11AAE

##### Upgrade SKUS

HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS R7A10AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS R7A12AAE

HPE GreenLake for Compute Ops Management Enhanced 1-year Monthly ProLiant SaaS R7A13AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Monthly ProLiant SaaS R7A14AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Monthly ProLiant SaaS R7A15AAE

HPE GreenLake for Compute Ops Management Enhanced 1-year Quarterly ProLiant SaaS R7A16AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Quarterly ProLiant SaaS R7A17AAE

HPE GreenLake for Compute Ops Management Enhanced 5-year Quarterly ProLiant SaaS R7A18AAE

HPE GreenLake for Compute Ops Management Enhanced 3-year Annual ProLiant SaaS R7A19AAE

### Core Options

HPE GreenLake for Compute Ops Management Enhanced 5-year Annual ProLiant SaaS R7A20AAE

#### HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

**Notes:** For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within the ASQ order:

HPE GreenLake for Compute Ops Management Base SaaS R6Z73AAE

For more information, visit the HPE GreenLake for Compute Ops Management

QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers - CTO only. No OEM. - Complete list can be found here: Latest

Supported Server List: <https://www.hpe.com/info/com-supported-servers>

# FARTAK SERVICE



### Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

#### Embedded Management

##### HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO for Open Distributed Infrastructure Management 3-year 24x7 LTU	R4H59A
HPE iLO for Open Distributed Infrastructure Management 1-year 24x7 LTU	R4H60A
HPE iLO for Open Distributed Infrastructure Management 3-year 24x7 E-LTU	R4H61AAE
HPE iLO for Open Distributed Infrastructure Management 1-year 24x7 E-LTU	R4H62AAE
HPE iLO for Open Distributed Infrastructure Management 3-year 24x7 AKA Tracking E-LTU	R4H63AAE
HPE iLO for Open Distributed Infrastructure Management 1-year 24x7 AKA Tracking E-LTU	R4H64AAE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21

#### Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability. To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative.

**Notes:** Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and the number of people to use for any installation.

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit P52341-B21

**Notes:** This Rail kit can be selected only with the 4LFF/EDSFF CTO server.

HPE DL3XX Gen11 Easy Install Rail 2 Kit P52351-B21

**Notes:** This Rail kit can be selected only with the 8SFF CTO server.

HPE Easy Install Rail 7 Kit P52339-B21

**Notes:** This Rail kit can be selected only with the GPU CTO server.

HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit P26489-B21

**Notes:** CMA can be selected only with the Rail kit.

#### HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries, and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<http://www.hpe.com/storage/BURACompatibility> .

#### HPE Racks

### Additional Options

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional rack options and rack specifications.
  - Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional rack options and rack specifications.
  - Please see the [HPE Standard Series Racks QuickSpecs](#) for information on additional rack options and rack specifications.
- 

### HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- 

### HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).
  - Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
  - Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.
- 

### HPE Rack Options

- Please see the [HPE KVM Switches web page](#) for information on these products and their specifications
- 

### HPE Support Service

#### Installation Services

HPE Install ProLiant DL3xx Service

U4506E

HPE Installation and Startup DL3xx Service

U4507E

#### Tech Care

HPE 3 Year Tech Care Essential DL325 GEN11 Service

H78S6E

HPE 3 Year Tech Care Essential wDMR DL325 GEN11 Service

H78S7E


HPE 5 Year Tech Care Essential DL325 GEN11 Service

H78V0E

HPE 5 Year Tech Care Essential wDMR DL325 GEN11 Service

H78V1E

## Memory

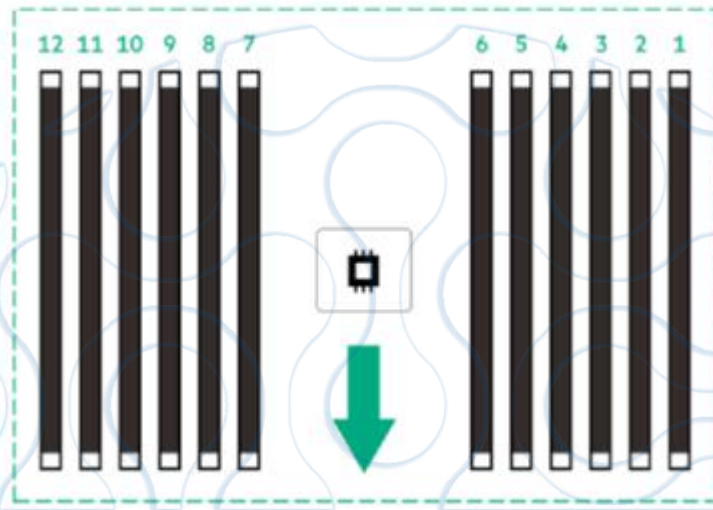

The arrow points to the front of the server

---

### General Memory Population Rules and Guidelines:

- Install DIMMs only after the corresponding processor is installed.
  - To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
  - The maximum memory speed is a function of the memory type, memory configuration, and processor model.
  - The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, and the number and model of installed processors qualified on the platform.
  - To realize the performance memory capabilities listed in this document, HPE DDR5 Smart Memory is required. For additional information, please see the: **HPE DDR5 Smart Memory QuickSpecs**
  - For details on the Memory Population Rules and Guidelines with AMD EPYC 9004 series processors, please go to: <https://www.hpe.com/psnow/doc/a50007481enw>
-


## Storage




4LFF drives




8SFF + Optional 2SFF (SAS/SATA/ NVMe)

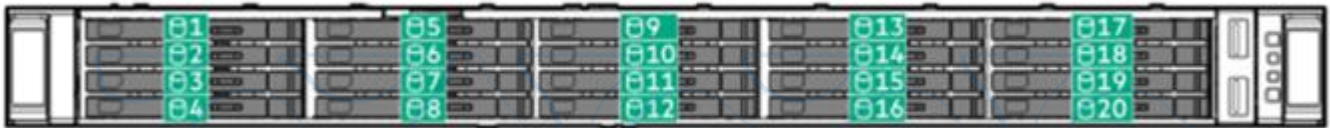

20 EDSFF E3.S 1T Drives

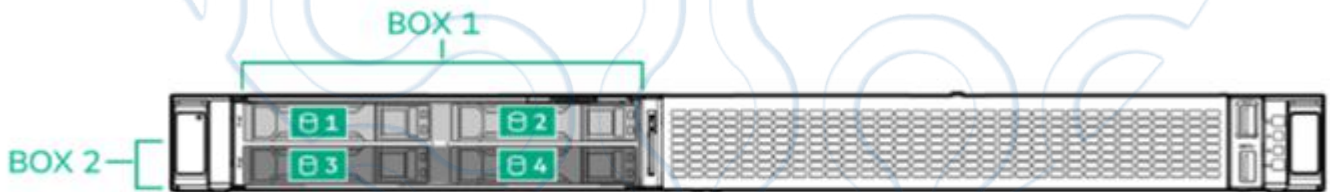

4 SFF Drives in GPU CTO server

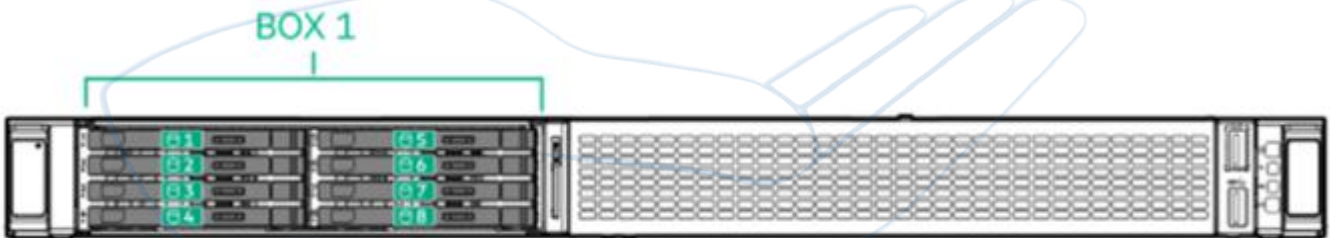

8 EDSFF Drives in GPU CTO server

## Technical Specifications

### System Unit

#### Dimensions (Height x Width x Depth)

- 8SFF chassis:
  - 4.29 X 43.46 X 64.94 cm
  - 1.69 X 17.11 X 25.57 In
- 4LFF & EDSFF chassis:
  - 4.29 X 43.46 X 70.89 cm
  - 1.69 X 17.11 X 27.91 In
- GPU Chassis
  - 4.29 X 43.46 X 81.84 cm
  - 1.69 X 17.11 X 32.22 In
- Package
  - 24.2 X 60 X 91.6 cm
  - 9.53 X 23.6 X 36.06 In

#### Weight (approximate)

- 8SFF chassis:
  - Minimum: 8 SFF chassis with 0 drives, 1 processor, 1 power supply, 1 standard heatsink, 1 DIMM, 1 Smart Array controller, and 7 standard fans.
    - o 12.56 kg
    - o 27.69 lb
  - Maximum: 8 SFF chassis with 8 drives, 1 processor, 2 power supply, 1 standard heatsink, 12 DIMM, 1 Smart Array controller, and 7 standard fans.
    - o 15.54 kg
    - o 34.27 lb
  - Package
    - o 4.21 kg
    - o 9.281 lb
- 4LFF chassis:
  - Minimum: 4 LFF chassis with 0 drives, 1 processor, 1 power supply, 1 performance heatsink, 1 DIMM, 1 Smart Array controller, and 7 performance fans.
    - o 14.31 kg
    - o 31.54 lb
  - Maximum: 4 LFF chassis with 4 drives, 1 processor, 1 power supply, 1 performance heatsink, 1 DIMM, 1 Smart Array controller, and 7 performance fans.
    - o 17.07 kg
    - o 37.63 lb
  - Package
    - o 4.145 kg
    - o 9.138 lb
- EDSFF chassis:
  - Minimum: EDSFF chassis with 1 drive, 1 processor, 1 power supply, 1 standard heatsink, 2 DIMM, and 7 performance fans.
    - o 13.71 kg
    - o 30.23 lb

### Technical Specifications

- Maximum: EDSFF chassis with 20 drives, 1 processor, 1 power supply, 1 performance heatsink, 12 DIMM, and 7 performance fans.
  - o 17.76 kg
  - o 39.15 lb
- GPU Chassis
  - Minimum: GPU chassis with 2 EDSFF drives, 1 double-width accelerators, 1 processor, 1 power supply, 1 standard heatsink, 2 DIMM, and 7 performance fans.
    - o 16.59 kg
    - o 36.58 lb
  - Maximum GPU chassis with 8 EDSFF drives, 2 double-width accelerators, 1 processor, 1 power supply, 1 performance heatsink, 12 DIMM, and 7 performance fans.
    - o 21.05 kg
    - o 46.41. lb

---

### Input Requirements(per power supply)

#### Rated Line Voltage

- 100 to 120 VAC
- 200 to 240 VAC

---

### BTU Rating

#### Maximum

- For 1600W Power Supply: 5918 BTU/hr (at 200 VAC), 5884 BTU/hr (at 240 VAC) for China
- For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
- For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

---

### Power Supply Output(per power supply)

- **Rated Steady-State Power**

- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VAC)
- For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only
- For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

- **Maximum Peak Power**

- For 1600W Power Supply: 1600W (at 200 to 240 1VAC), 1600W (at 240 VAC) input for China only
- For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only
- For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), and 500W (at 240 VAC) input for China only

---

### System Inlet Temperature

### Technical Specifications

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. The maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). The maximum rate of change is 20°C/hr (36°F/hr).

---

### Relative Humidity(non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

---

### Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. The maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). The maximum allowable altitude change rate is 457 m/min (1500 ft/min).

---

## Technical Specifications

### Emissions Classification (EMC) - Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

[https://support.hpe.com/hpesc/public/docDisplay?docLocale=en\\_US&docId=c03471072](https://support.hpe.com/hpesc/public/docDisplay?docLocale=en_US&docId=c03471072)

### Acoustic Noise

Listed are the declared mean A-Weighted sound power levels (LwAm), declared average bystander position A-Weighted sound pressure levels (LpAm), and the statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LwA,m when the product is operating in a 23°C ambient environment. Noise emissions were measured under ISO 7779 (ECMA 74) and declared under ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

<b>Idle</b>	
LWA,m	5.1 B Perf 4.7 B Value
LpAm	37 dBA Perf 35 dBA Value
Kv	0.4 B Perf 0.4 B Value
<b>Operating</b>	
LWA,m	5.9 B Perf 5.7 B Value
LpAm	47 dBA Perf 42 dBA Value
Kv	0.4 B Perf 0.4 B Value

#### Notes:

- The declared mean A-weighted sound power level, LWA,m, is computed as the arithmetic average of the measured.
- A-weighted sound power levels for a randomly selected sample, rounded to the nearest 0,1 B.
- The declared mean A-weighted emission sound pressure level, LpA,m, is computed as the arithmetic average of the measured A-weighted emission sound pressure levels at the bystander positions for a randomly selected sample, rounded to the nearest 1 dB.
- The statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LWA,m, such that there will be a 95 % probability of acceptance when using the verification procedures of ISO 9296, if no more than 6,5 % of the batch of new equipment, has A-weighted sound power levels greater than (LWA,m + Kv).
- The quantity, LWA,c (formerly called LWAd), can be computed from the sum of LWA,m, and Kv.
- All measurements made to conform to ISO 7779 / ECMA-74 and declared to conform to ISO 9296 / ECMA-109.
- B, dB, abbreviations for bels and decibels, respectively, where 1 B = 10 dB.

## Technical Specifications

- The results in this declaration apply only to the model numbers listed above when operating and tested according to the indicated modes and standards. A system with additional configuration components or increased operating functionality may increase the noise emission values.
  - System under abnormal conditions may increase the noise level, persons in the vicinity of the product [cabinet] for extended periods should consider wearing hearing protection or using other means to reduce noise exposure.
- 

## Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered, or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise website. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

---

FARTAK SERVICE





## Summary of Changes

Date	Version History	Action	Description of Change
07-Aug-2023	Version 10	Changed	Overview, Standard Features, Pre-Configured Models, Configuration Information, Core Options, Additional Options, Storage, and Technical Specifications sections were updated.
10-Jul-2023	Version 9	Changed	Overview, Standard Features, Service and Support, Pre-Configured Models, Configuration Information, Core Options and Memory sections were updated.
13-Jun-2023	Version 8	Changed	Overview, Standard Features, Service and Support, Pre-Configured Models and Core Options sections were updated.
01-May-2023	Version 7	Changed	Standard Features and Core Options sections were updated
03-Apr-2023	Version 6	Changed	Overview, Standard Features, Configuration Information, Core Options, Additional Options, Memory, Storage and Technical Specifications sections were updated.
06-Mar-2023	Version 5	Changed	Overview, Standard Features, Configuration Information, additional Options and Technical Specifications sections were updated.
06-Feb-2023	Version 4	Changed	Overview, Standard Features, Configuration Information, additional Options and Technical Specifications sections were updated.
19-Dec-2022	Version 3	Changed	Overview and Standard Features sections were updated.
05-Dec-2022	Version 2	Changed	All sections were updated.
10-Nov-2022	Version 1	New	New QuickSpecs.

## Copyright

Make the right purchase decision. Contact our presales specialists.



© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

AMD® and EPYC® are registered trademarks of Advanced Micro Devices Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50004297enw - 16901 - Worldwide - V10 - 07-August-2023

