


Overview

HPE ProLiant DL365 Gen11

The new HPE ProLiant DL365 Gen11 server is a rack-optimized 1U 2P dense solution that delivers exceptional compute performance, upgraded high-speed data transfer rate and memory depth at 2P compute capability. Powered by 4th Generation AMD EPYC™ Processors with up to 128 cores, increased memory bandwidth (up to 6 TB), and high-speed PCIe Gen5 I/O, the HPE ProLiant DL365 Gen11 server is a superb rack-optimized, 1U 2P, dense solution.

The silicon root of trust anchors the server firmware to an HPE-exclusive ASIC, creating an immutable fingerprint for the AMD Secure Processor that must be matched exactly before the server boots.


The HPE ProLiant DL365 Gen11 server is an excellent choice for those who require increased compute density with built-in security and flexibility. A scalable, compute dense solution for high performance workloads such as general purpose virtualization, Virtual Desktop Infrastructure (VDI), Electronic Design Automation (EAD) or Compute-Aided Design (CAD) and more.

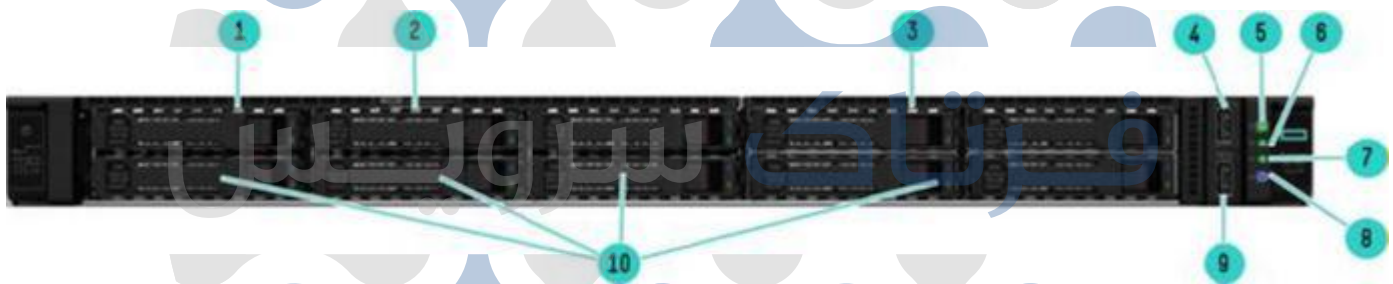

8 SFF Front View - 8 SFF & No Media Option Shown

- | | |
|---|--------------------------------|
| 1. Quick removal access panel | 6. Health LED |
| 2. Serial no. label pull tab | 7. NIC status LED |
| 3. Optional Media Bay: | 8. UID button LED |
| Option Shown: no media | |
| Optional: +2 SFF U.3 Tri-mode drive cage (total max 10 SFF) | |
| Optional: 9.5mm SATA DVD-ROM/RW Optical Drive | |
| 4. USB 3.2 Gen1 port | 9. iLO service port |
| 5. Power On/Standby button and system power LED | 10. 8 SAS/SATA/NVMe drive bays |


Overview

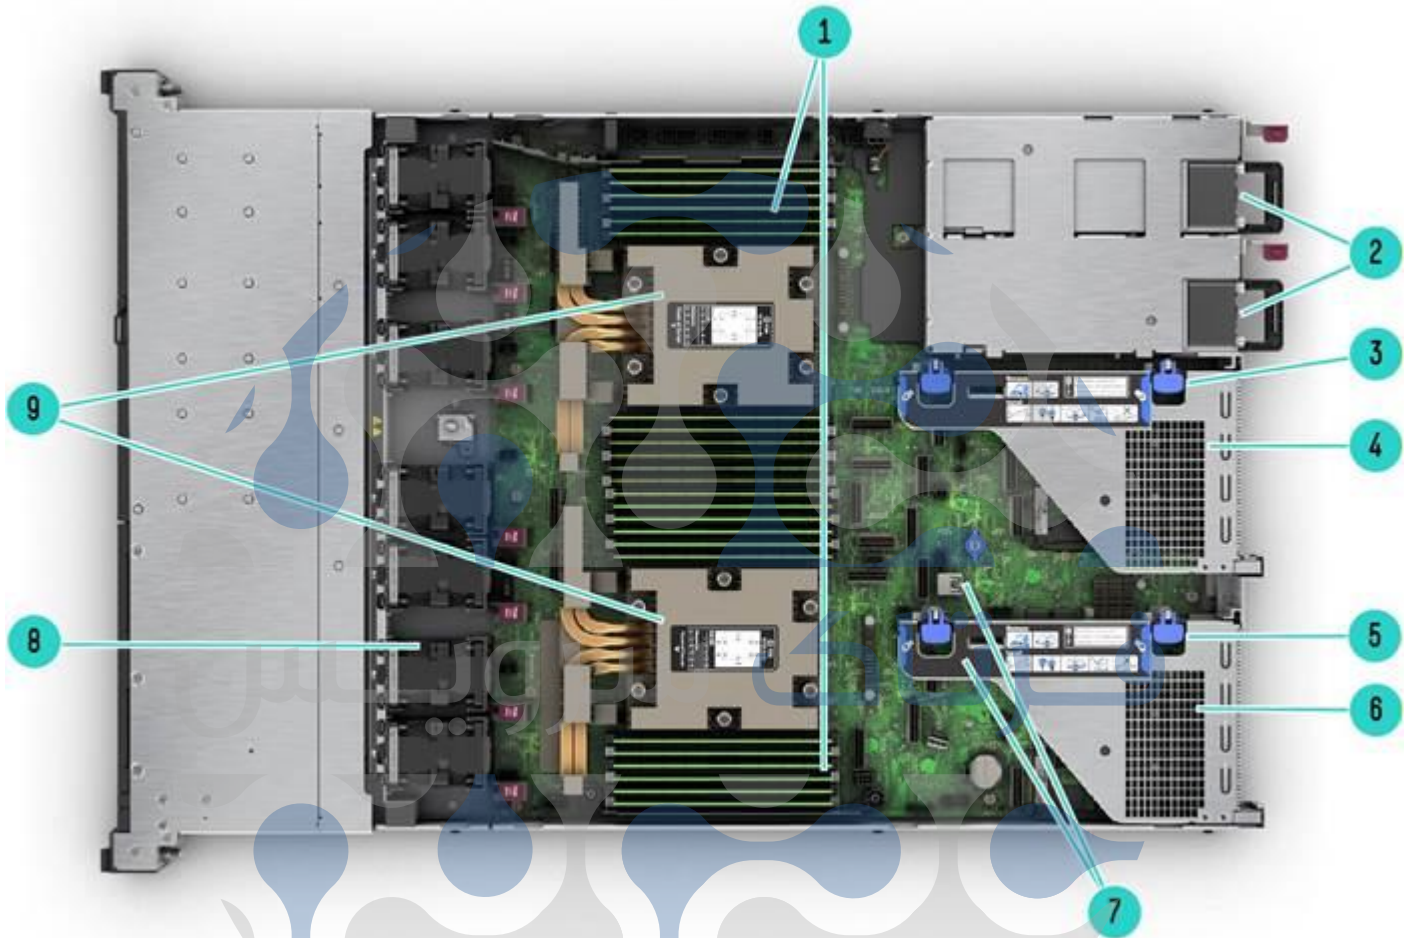

Internal View

- | | |
|--|--|
| 1. DDR5 DIMM slots. Shown populated in 24 slots | 6. (Under) OCP 3.0 Slot 1 |
| 2. Hot Plug redundant HPE Flexible Slot Power supplies | 7. 2x USB 3.2 Gen1 ports |
| 3. Secondary Riser connector cage, optional | 8. Fan cage shown with 7 High Performance Fans |
| 4. (Under) OCP 3.0 Slot 2 | 9. 2 Processors (heatsinks shown) |
| 5. Primary PCIe riser cage, standard | |

Overview

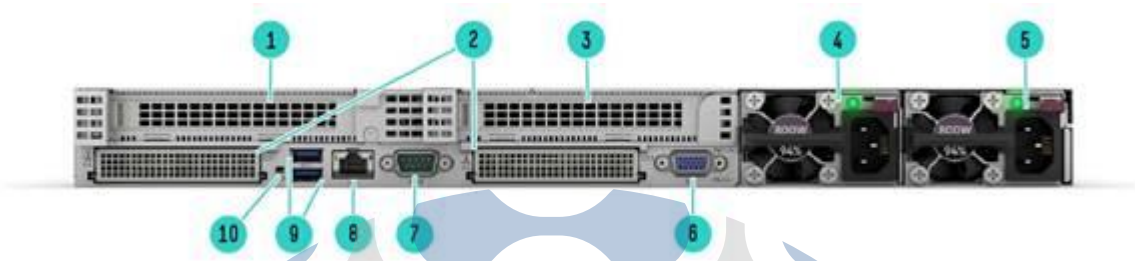

Rear View - Standard for all DL365 Gen11

1. Slot 1 PCIe 5.0
2. OCP 3.0 Slots
3. Slot 2 PCIe 5.0
4. Hot-plug Power Supply 2
5. Hot-plug Power Supply 1
6. VGA port
7. Serial port (optional)
8. Dedicated iLO management port
9. USB 3.2 Gen1 ports
10. UID LED

What's New

- Supports the 4th Generation AMD EPYC™ Processors that supports up to 128 cores.
- New CTO servers including EDSFF (up to 20 drive bay), GPU, and 8SFF CTO servers
- Supports up to 2x Single Width or 2x Double Width GPU cards at the front chassis
- NVIDIA A16 and NVIDIA L4 GPUs added
- Direct Liquid Cooling (DLC) is now supported
- 12 DIMM channels per processor for up to 6TB total DDR5 memory 4800MT/s
- 96GB and 128GB DDR5 RDIMM is now supported
- Advanced data transfer rate and higher network speed from the PCIe Gen5 serial expansion bus
- Includes HPE Integrated Lights-Out 6 (iLO 6) server management software
- Supports hot-pluggable, high-availability RAID M.2 boot options
- OpenBMC Capable through iLO6 Transfer of Ownership Process

Standard Features

Platform Information

Form Factor

- 1U rack

Chassis Types

- 8 SFF with optional optical drive kit, and optional SFF or NVMe drive bay options
 - 20 EDSFF drive bay.
 - 2 Single Width or 2 Double Width GPUs with 8 EDSFF or 4SFF U.3 NVMe drive bay.
-

System Fans

- Choice of Standard Fan Kit and Performance Fan Kit. One fan per kit.
- 2 CPUs
 - Standard fan kits should be supported when the processors are equal to or lower than cTDP 240W
 - Performance fan kits should be supported when the processors are higher than cTDP 240W
 - Performance fan kits should be required when drive is NVMe or SAS4 drives.
 - Performance fan kits should be required when 10 SFF SAS/SATA/NVMe is configured
 - Performance fan kits should be required when EDSFF or GPU CTO Servers are configured

Notes:

- The DL365 Gen11 supports up to 7 fans with fan redundancy built in. One fan rotor failure will place server in degraded mode but fully functional. Two fan rotor failures could trigger warning and imminent server shutdown.
 - Each Fan kits are designated to operate under different configuration. For more information, please refer to the Cooling option message in the Unique option section
-


Processors Up to 2 of the following depending on model.

Notes: For more information regarding AMD EPYC processors, please see the following:

<https://www.amd.com/en/products/epyc>



Standard Features

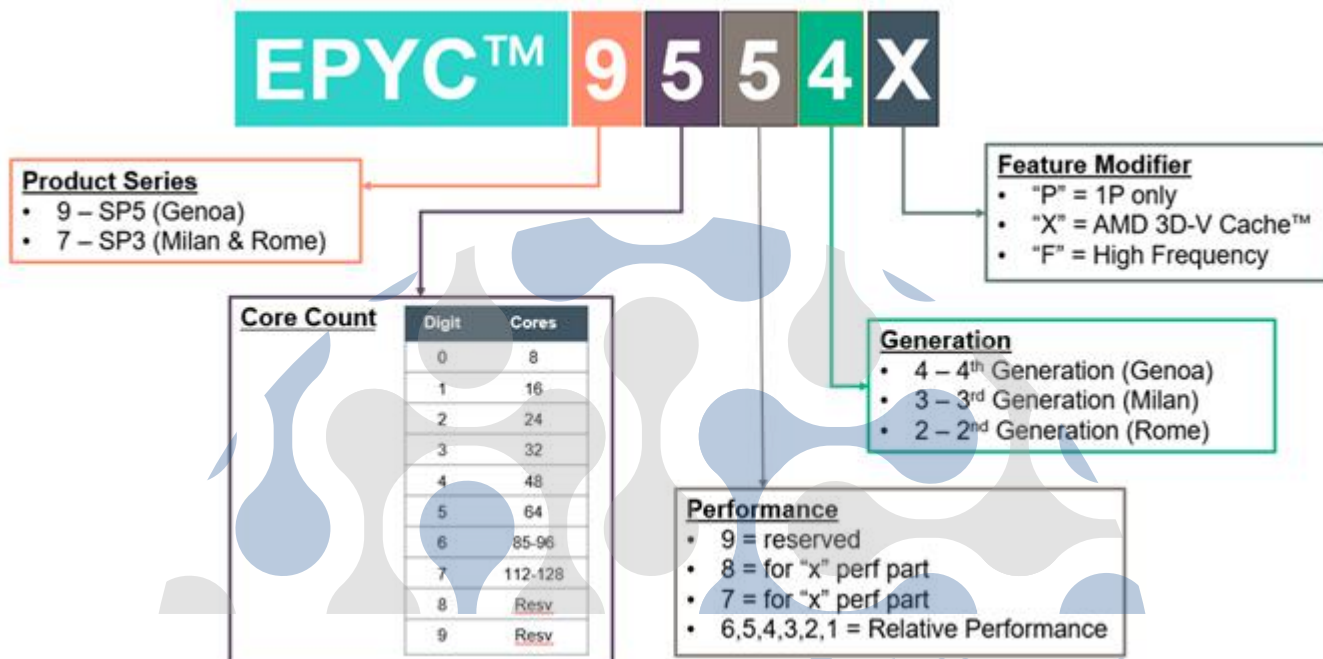

AMD EPYC Processor	Cores	Base Frequency	Max Frequency	Max Memory	Wattage	Cache	Memory
EPYC 9124	16	3.0 GHz	3.7 GHz	3 TB	200 W	64 MB	4800MT/s
EPYC 9174F	16	4.1 GHz	4.4 GHz	3 TB	320 W	256 MB	4800MT/s
EPYC 9224	24	2.5 GHz	3.7 GHz	3 TB	200 W	64 MB	4800MT/s
EPYC 9254	24	2.9 GHz	4.15 GHz	3 TB	200 W	128 MB	4800MT/s
EPYC 9274F	24	4.05 GHz	4.3 GHz	3 TB	320 W	256 MB	4800MT/s
EPYC 9334	32	2.7 GHz	3.9 GHz	3 TB	210 W	128 MB	4800MT/s
EPYC 9354	32	3.25 GHz	3.8 GHz	3 TB	280 W	256 MB	4800MT/s
EPYC 9374F	32	3.85 GHz	4.3 GHz	3 TB	320 W	256 MB	4800MT/s
EPYC 9454	48	2.75 GHz	3.8 GHz	3 TB	290 W	256 MB	4800MT/s
EPYC 9474F	48	3.6 GHz	4.1 GHz	3 TB	360 W	256 MB	4800MT/s
EPYC 9534	64	2.45 GHz	3.7 GHz	3 TB	280 W	256 MB	4800MT/s
EPYC 9554	64	3.1 GHz	3.75 GHz	3 TB	360 W	256 MB	4800MT/s
EPYC 9634	84	2.25 GHz	3.7 GHz	3 TB	290 W	384 MB	4800MT/s
EPYC 9654	96	2.4 GHz	3.7 GHz	3 TB	360 W	384 MB	4800MT/s
EPYC 9734	112	2.2 GHz	3.0 GHz	3 TB	340 W	256 MB	4800MT/s
EPYC 9754	128	2.25 GHz	3.1 GHz	3 TB	360 W	256 MB	4800MT/s
EPYC 9184X	16	3.55 GHz	4.2 GHz	3 TB	320 W	768 MB	4800MT/s
EPYC 9384X	32	3.1 GHz	3.9 GHz	3 TB	320 W	768 MB	4800MT/s
EPYC 9684X	96	2.55 GHz	3.7 GHz	3 TB	400 W	1,150 MB	4800MT/s

Notes:

- All 4th generation AMD EPYC processors can support up to 3TB of memory each under 1DPC, 12 channel per processor. 6TB of memory per two processors.
- 160 PCIe 5.0 lanes support with two sockets. Motherboard supports 3XGMI two-processor interconnect by default.
- The wattage information indicates the default cTDP (Configurable TDP) of the processor.

Standard Features

Chipset

No chipset - System on Chip (SoC) design.

System Management Chipset

HPE iLO 6 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

One of the following depending on model

Type	HPE DDR5 Smart Memory, Registered (RDIMM)
DIMM Slots Available	24 12 DIMM slots per processor, 12 channels per processor, 1 DIMM per channel
Maximum capacity (RDIMM)	6.0 TB 24 x 256 GB RDIMM* @ 4800 MT/s at 1 DPC

Notes:

- All processors support up to 6TB of memory per server when two processors are supported.
- LRDIMM and Persistent Memory are not supported.
- For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).
- For General Server Memory and Persistent Memory Population Rules and Guidelines, see details here: <http://www.hpe.com/docs/memory-population-rules>

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).

Expansion Slots

Primary Riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 5.0	X16	X16	Full-height, Half-length slot	Proc 1 slot

Standard Features

Secondary Riser					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
2	PCIe 5.0	X16	X16	Full-height, Half-length slot	Proc 2
2	PCIe 5.0	X16	X16	Low Profile	Proc 2
GPU Riser 1					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4	PCIe 5.0	X16	X16	Full-height, Full-length slot	Proc 2
GPU Riser 2					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
5	PCIe 5.0	X16	X16	Full-height, Full-length slot	Proc 1

Notes:

- Secondary riser position supports both Low Profile or FHHL cards. Only one can be supported at a time.
- When NS204i-u Hot Plug Boot Optimized Storage Device is selected, low profile secondary riser (P55029-B21) must be in the configuration.
- When both the Secondary Slot 2 & GPU Riser #1 Slot 4 are supported, Slot 2 & Slot 4 combined can support up to 112GB/s bandwidth due to processor limitations.
- When both the GPU Riser #2 Slot 5 & Slot 21 (OCP1) are supported, Slot 5 & Slot 21 combined can support up to 112GB/s bandwidth due to processor limitations.

Storage Controllers

The Gen11 controller naming framework has been updated to simplify identification as depicted below. For a more details breakout of the available Gen11 Smart Array Controllers visit the controller data sheet

NVMe Boot Device

- HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device

Notes:

- This kit does not occupy a PCIe slot
- NS204i-u is external accessible
- NS204i-u includes embedded 2x 480GB NVMe SSD
- RAID 1 supported on the NS204i-u boot optimized storage device

Software RAID

No Software RAID is supported on AMD Gen11 servers

Essential RAID Controllers

- HPE Smart Array E208e-p SR Gen10 Controller

Standard Features

Performance RAID Controllers

- HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller
- HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller
- HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
- HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller
- HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller
- HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage Controller

Notes:

–For additional details, please visit:

[HPE Compute MR Gen11 Controllers Quick Specs](#)

[HPE Compute SR Gen11 Controllers Quick Specs](#)

Graphics

Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

HPE iLO 6 on system management memory

- 64 MB Flash
- 8 Gbit DDR 4 with ECC protection

Internal Storage Devices

Optical Drive

- Available on 8 SFF CTO Servers as an option (DVD-ROM or DVD-RW)

Hard Drives

- None ship standard

Maximum Storage

Storage	Capacity	Configuration
Hot Plug SFF SAS HDD	24 TB	(8+2) x 2.4 TB
Hot Plug SFF SATA HDD	20 TB	(8+2) x 2.0 TB
Hot Plug SFF SAS SSD	76.8 TB	(8+2) x 7.68 TB
Hot Plug SFF SATA SSD	76.8 TB	(8+2) x 7.68 TB
Hot Plug SFF NVMe PCIe U.3 SSD	153.6 TB	(8+2) x 15.36 TB

Standard Features

Power Supply

- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency.
- HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit
Notes: Available in 96% Power Efficiency.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% Power Efficiency.
- HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit
Notes:
 - Available in 94% Power Efficiency.
 - 200-240VAC power input only.

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

Interfaces

Serial Ports	1 port - Optional in rear
Video Ports	1 Rear VGA Port - Standard
Network Ports	None. Choice of OCP or stand up card, supporting a wide arrange of NIC adapters
HPE iLO Remote Management Network Port	1 Gb Dedicated
Front iLO Service Port	1 standard
USB 3.2 Gen1	5 standard on all models: 1 front, 2 rear, 2 internal
SID (Systems Insight Display)	Optional

Standard Features

Operating Systems and Virtualization Software Support for ProLiant Servers

- Windows Server 2019
- Windows Server 2022
- Red Hat Enterprise Linux (RHEL) 8.6
- Red Hat Enterprise Linux (RHEL) 9.0
- SUSE Linux Enterprise Server (SLES) 15 SP4
- VMware ESXi 7.0 U3
- VMware ESXi 8.0

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.1 Gen1 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization
- Embedded TPM Support

UEFI Boot Mode only

- TPM 2.0 Support
- NVMe Boot Support
- iSCSI Software Initiator Support
- HTTP/HTTPS Boot support as a PXE alternative
- Boot support for option cards that only support a UEFI option ROM

Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

- Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.

Standard Features

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- VGA/Display Port
- USB 3.2 Gen1 Compliant
- USB 2.0 Compliant
- Energy Star 4.0

Notes: Energy Star 4.0 is supported. Please configure P68503-B21 to trigger Energy Star 4.0

- SMBIOS 3.1
- UEFI 2.7
- UEFI Class 3
- Redfish API
- IPMI 2.0
- Secure Digital 2.0
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen11 servers are compliant with Lot9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more.html>

- ASHRAE A3/A4

Notes: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <https://www.hpe.com/support/ASHRAEGen11>

- UEFI (Unified Extensible Firmware Interface Forum)
- APML 1.0

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>

Standard Features

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at https://support.hpe.com/hpesc/public/docDisplay?docId=c04465280&docLocale=en_US.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

OpenBMC Support

OpenBMC Capable through iLO6 Transfer of Ownership Process.

Learn more at [OpenBMC enablement on HPE ProLiant servers | HPE](#)

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active System Health Viewing

The Active System Health Viewer (AHSV) is deprecated as of March 2022. Users are now recommended to use the InfoSight for Servers Portal for AHS viewing capabilities. In InfoSight for Servers portal, users will also be able to view hardware configuration details, firmware and driver information, warranty and support status of a server, wellness alerts, and create support cases for servers under a valid warranty or support contract.

HPE InfoSight provides the same security assurances as that of AHSV. Furthermore, InfoSight can be used as an AHSV replacement even if customers do not want to share AHSV logs and telemetry data on an ongoing basis.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at

Standard Features

<https://www.hpe.com/servers/smart-update.html>

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9, Gen10, Gen10 Plus, and Gen11 HPE servers. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView is an on premesis, multi-generational server monitoring and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license, all provided by the same tool. Learn more at <http://www.hpe.com/info/oneview>.

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

A 3-year subscription to HPE GreenLake for Compute Ops Management is added by default when ordering an HPE ProLiant Gen11 rack, tower, or micro server.

For more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Standard Features

Security

- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-3 validation (iLO 6 certification in progress)
- Common Criteria certification (iLO 6 certification in progress)
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- Tamper-free updates - components digitally signed and verified
- Secure Recovery - recover critical firmware to known good state on detection of compromised firmware
- Ability to rollback firmware
- Secure erase of NAND/User data
- TPM (Trusted Platform Module) 2.0 option
- Bezel Locking Kit option
- Chassis Intrusion detection option

Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/support/ProLiantServers-Warranties>

Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It builds upon the base features of HPE OneView Standard, provides full-featured licenses which can be purchased for managing multiple HPE server generations. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we have created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type of workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with

Optional Features


remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome>

فرتاک سرویس

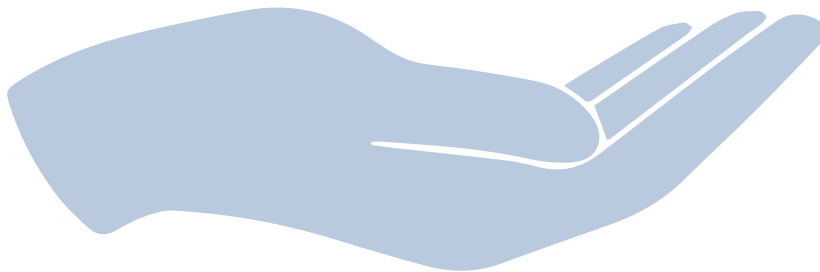

Service and Support

HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

Consulting Services

No matter where you are in your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>

Service and Support

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- **Lifecycle Install and Startup Services:** Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- **HPE Firmware Update Analysis Service:** Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- **HPE Firmware Update Implementation Service:** Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- **Implementation assistance services:** Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- **HPE Service Credits:** Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services:

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

Service and Support

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>

AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpesc/public/home/signin>

Consume IT On Your Terms

HPE GreenLake edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE" <https://www.hpe.com/us/en/contact-hpe.html>

For more information

<http://www.hpe.com/services>

Pre-configured Models

Base & Performance Model		
SKU Number	P66779-B21 P66779-291	P66780-B21 P66780-291
Model Name	HPE ProLiant DL365 Gen11 9124 3.0GHz 16-core 1P 32GB-R 8SFF 800W PS Server	HPE ProLiant DL365 Gen11 9224 2.5GHz 24-core 1P 32GB-R 8SFF 800W PS Server
Processor	9124 (16-Core, 3.0 GHz, 240W)	9224 (24-Core, 2.5 GHz, 240W)
Number of Processors	One processor	One processor
Memory	32 GB RDIMM DR 4800 MT/s (1x 2Rx8 32 GB)	32 GB RDIMM DR 4800 MT/s (1x 2Rx8 32 GB)
Network Controller	BCM 5719 1GbE 4p BASE-T OCP3 Adptr plus choice of standup card	BCM 57416 10GbE 2p BASE-T OCP3 Adptr plus choice of standup card
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
Hard Drive	None ship as standard	None ship as standard
Internal Storage	8 SFF Chassis (upgradeable to 10 SFF front)	8 SFF Chassis (upgradeable to 10 SFF front)
Optical Drive Bay	Optional	Optional
Optical Drive	None ship as standard	None ship as standard
PCI-Express Slots	1 slot (x16) as standard (2 nd Slot upgradeable. Please refer to PCIe slot section in this doc)	1 slot (x16) as standard (2 nd Slot upgradeable. Please refer to PCIe slot section in this doc)
Power Supply	1x 800W HPE FlexSlot Power Supply	1x 800W HPE FlexSlot Power Supply
Fans	5-standard fans	5-standard fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
Energy Star	3.0 certified	3.0 certified
Form Factor	1U Rack	1U Rack
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.	3-year parts, 3-year labor, 3-year onsite support with next business day response.

Country Code Key

xx1 = B21 Worldwide
 xx1 = 291 Japan
 xx1 = AA1 PRC
 xx1 = 421 EU

Pre-configured Models

Base & Performance Model		
SKU Number	P59707-421	P59708-421
Model Name	HPE ProLiant DL365 Gen11 9124 2.7GHz 16-core 1P 32GB-R 8SFF 1000W PS EU Server	HPE ProLiant DL365 Gen11 9224 2.7GHz 16-core 1P 32GB-R 8SFF 1000W PS EU Server
Processor	9124 (16-Core, 3.0 GHz, 240W)	9224 (24-Core, 2.5 GHz, 240W)
Number of Processors	One processor	One processor
Memory	32 GB RDIMM DR 4800 MT/s (1x 2Rx8 32 GB)	32 GB RDIMM DR 4800 MT/s (1x 2Rx8 32 GB)
Network Controller	BCM 5719 1GbE 4p BASE-T OCP3 Adptr plus choice of standup card	BCM 57416 10GbE 2p BASE-T OCP3 Adptr plus choice of standup card
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
Hard Drive	None ship as standard	None ship as standard
Internal Storage	8 SFF Chassis (upgradeable to 10 SFF front)	8 SFF Chassis (upgradeable to 10 SFF front)
Optical Drive Bay	Optional	Optional
Optical Drive	None ship as standard	None ship as standard
PCI-Express Slots	1 slot (x16) as standard (2 nd Slot upgradeable. Please refer to PCIe slot section in this doc)	1 slot (x16) as standard (2 nd Slot upgradeable. Please refer to PCIe slot section in this doc)
Power Supply	1x 1000W HPE FlexSlot Power Supply	1x 1000W HPE FlexSlot Power Supply
Fans	5-standard fans	5-standard fans
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download)
Energy Star	3.0 certified	3.0 certified
Form Factor	1U Rack	1U Rack
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.	3-year parts, 3-year labor, 3-year onsite support with next business day response.

Country Code Key

xx1 = B21 Worldwide
 xx1 = 291 Japan
 xx1 = AA1 PRC
 xx1 = 421 EU

Configuration Information

Smart Templates from HPE

HPE is releasing new Smart Template technology in the One Config Advanced (OCA) configurator. These Templates represent the CTO equivalents of the top-selling BTO configurations. They are intended to provide simple starting points to assist you in easily creating and customizing your desired Server solutions. HPE Servers that have Platform Templates, developed by HPE Product Managers, will have a separate tab in the HPE OCA configurator.

Workload Solutions Templates from HPE

The Workload Solutions Templates build on the Smart Templates technology to easily develop working configurations of the most compelling Workload Solutions. The templates complement the Reference Builds developed by HPE. Workload Solutions templates preconfigure some of the key architecture decisions and make it easier for Sellers to get started and complete a differentiated server solution for your customer's specific workload.

Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to provide a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have higher fulfilment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages and better recovery dates. This platform has Mainstream SKUs in the options portfolio, and is eligible for the improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

Mainstream Configurations

HPE is using the new Smart Templates technology to present Mainstream configurations. All the options in a Mainstream configuration are pre-selected Mainstream SKUs to optimize the performance, predictability and fulfilment experience. Check the Template section in our configurators for eligible Mainstream configurations.

European Union Erp Lot 9 Regulation

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Configuration Information

Step 1: Base Configuration (choose one of the following configurable models)

CTO Server	HPE ProLiant DL365 Gen11 8SFF Configure-to-order Server
SKU Number	P53933-B21
Processor	Not included as standard
DIMM Slots	24-DIMM slots*
Storage Controller	Choice of HPE OCP or PCIe plug-in controller
PCIe	1 PCIe x16 Primary Riser
Drive Cage - included	8 SFF (Backplane is not included)
Network Controller	Choice of OCP and stand up card
Fans	Not included as standard**
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE GreenLake for Compute Ops Management (subscription included)
USB	Front: 1x USB 3.2 Gen1 + 1x iLO service port Rear: 2x USB 3.2 Gen1 Internal: 2x USB 3.2 Gen1
CTO Server	HPE ProLiant DL365 Gen11 EDSFF Configure-to-order Server
SKU Number	P53934-B21
Processor	Not included as standard
DIMM Slots	24-DIMM slots*
Storage Controller	Choice of HPE OCP or PCIe plug-in controller
PCIe	1 PCIe x16 Primary Riser
Drive Cage - included	20 EDSFF
Network Controller	Choice of OCP and stand up card
Fans	Not included as standard**
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE GreenLake for Compute Ops Management (subscription included)
USB	Front: 1x USB 3.2 Gen1 + 1x iLO service port Rear: 2x USB 3.2 Gen1 Internal: 2x USB 3.2 Gen1



Configuration Information

CTO Server	HPE ProLiant DL365 Gen11 GPU Configure-to-order Server
SKU Number	P53935-B21
Processor	Not included as standard
DIMM Slots	24-DIMM slots*
Storage Controller	Choice of HPE OCP or PCIe plug-in controller
PCIe	1 PCIe x16 Primary Riser and 1 GPU Riser (GPU Riser located in front chassis)
Drive Cage - included	20 EDSFF
Network Controller	Choice of OCP and stand up card
Fans	Not included as standard**
Management	Default: HPE iLO Standard with Intelligent Provisioning, HPE OneView Standard (requires download), HPE GreenLake for Compute Ops Management (subscription included)
USB	Front: 1x USB 3.2 Gen1 + 1x iLO service port Rear: 2x USB 3.2 Gen1 Internal: 2x USB 3.2 Gen1

Notes:

- *24 DIMM slots require selection of 2 processors
- ** Fans should be selected separately depending on the configuration
- HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- If EDSFF CTO model is selected, then 2 processors must be selected.
- If EDSFF CTO model is selected, then "Performance Heatsink or DLC" and "Performance Fan" must be selected.
- TAA compliant configuration requires TAA versions of the CTO Server SKUs.
- All CTO servers are Energy Star 3.0 compliant.

CTO Server	8 SFF CTO Chassis
Included Drive Cage	8 SFF (backplane not included)
Universal Media Bay	Optional
ODD	Optional
8 SFF SAS/SATA/NVMe	Up to 1 Optional
2 SFF SAS/SATA/NVMe	Up to 1 Optional
Rear Drive Cages	Not Available

Notes: This applies to CTO configurations, field upgrades may differ depending on field configuration.

Backplane Types - Compatible Drive Type

	SATA	SAS	NVMe(U.3 Static)	NVME (U.3 Dynamic)
8 SFF U.3 Tri-mode BP	x	x	x	x
2 SFF U.3 Tri-mode BP	x	x	x	x

Configuration Information

Notes: U.2 backplanes are supported only as private options. U.2 backplanes do not support static drives, only the dynamic U.3 drives. U.2 backplanes also do not support SAS/SATA drives.

Step 2: Choose Required Options (only one of the following unless otherwise noted)

Please select one -B21 processor required below.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section.

Notes:

- Mixing of 2 different processor models are NOT allowed. For example: first processor, select P53696-B21 then for second processor, select P53696-B21 as well.
- Processor kits don't include heat sink and fans.

Step 2a: Choose Processors

Processor Option Kits

AMD EPYC 9124 3.0GHz 16-core 200W Processor for HPE	P53702-B21
AMD EPYC 9224 2.5GHz 24-core 200W Processor for HPE	P58540-B21
AMD EPYC 9354 3.25GHz 32-core 280W Processor for HPE	P53701-B21
AMD EPYC 9554 3.1GHz 64-core 360W Processor for HPE	P53700-B21
AMD EPYC 9654 2.4GHz 96-core 360W Processor for HPE	P53696-B21
AMD EPYC 9174F 4.1GHz 16-core 320W Processor for HPE	P53698-B21
AMD EPYC 9374F 3.85GHz 32-core 320W Processor for HPE	P53710-B21
AMD EPYC 9534 2.45GHz 64-core 280W Processor for HPE	P53699-B21
AMD EPYC 9634 2.25GHz 84-core 290W Processor for HPE	P53705-B21
AMD EPYC 9474F 3.6GHz 48-core 360W Processor for HPE	P53706-B21
AMD EPYC 9254 2.9GHz 24-core 200W Processor for HPE	P53707-B21
AMD EPYC 9454 2.75GHz 48-core 290W Processor for HPE	P53708-B21
AMD EPYC 9274F 4.05GHz 24-core 320W Processor for HPE	P53711-B21

Configuration Information

AMD EPYC 9334 2.7GHz 32-core 210W Processor for HPE	P53712-B21
AMD EPYC 9734 2.2GHz 112-core 340W Processor for HPE	P60465-B21
AMD EPYC 9754 2.25GHz 128-core 360W Processor for HPE	P60463-B21
AMD EPYC 9184X 3.55GHz 16-core 320W Processor for HPE	P63491-B21
AMD EPYC 9384X 3.1GHz 32-core 320W Processor for HPE	P63492-B21
AMD EPYC 9684X 2.55GHz 96-core 400W Processor for HPE	P63493-B21

Notes:

- For processors less than 240W and drive cage type is 8SFF, standard heatsink are required. User is allowed to change to performance heatsink.
- Standard fan kit is only allowed when processors are less than 240W, drive cage type is 8SFF and drives configured are less than 8x SAS or SATA drives.
- If Processor wattage is above 240W then Performance Heat Sink and Performance fan kit must be selected. This rule applies to all CTO servers.
- For 8SFF CTO models, when DLC is not selected: If the processor wattage is greater than or equal to 320W, then maximum 8 quantity of drives can be selected per server.
- For EDSFF CTO model: If the selected processor wattage is greater than or equal to 320W, then maximum of 12 EDSFF drives can be selected. (Not applicable if DLC Module is selected).

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen11 memory population rule whitepaper and optimal memory performance guidelines, please go to [Server memory population rules for HPE ProLiant Gen11 servers with AMD EPYC 9004 series](#)

processors

For additional information, please see the [HPE DDR5 Smart Memory QuickSpecs](#).

Notes:

- Memory DIMM availability with a server platform is dependent upon completion of certification testing.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- Memory compatibility may vary or be limited within a specific server family depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for a server model or family and yet occasionally not be supported with limited configurations within that server family. Please consult with the HPE server QuickSpecs or your HPE representative if you have any questions regarding memory compatibility with a specific HPE server configuration.

Registered DIMMs (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50309-B21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50311-B21

Configuration Information

HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P50312-B21
HPE 96GB (1x96GB) Dual Rank x4 DDR5-4800 CAS-46-45-45 EC8 Registered Smart Memory Kit	P66676-B21
HPE 128GB (1x128GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P69982-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P50313-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P50314-B21

Notes:

- Mixing of x4 & x8 memory is not allowed
- Mixing of Non-3DS and 3DS DIMMs is not allowed
- If 128GB/ 256GB Memory is selected, then Performance Heatsink and 7 Performance Fan must be selected.
- 256GB DIMM imposes more configuration restrictions due to its high profile thermal condition. Refer to the HPE configurator tool for detailed instructions
- For more detailed information regarding memory population rules, please visit <https://www.hpe.com/docs/server-memory>

Memory Blank Kit

HPE DDR4 DIMM Blank Kit	P07818-B21
-------------------------	------------

Notes: DIMM blank kit cannot be selected when 24 DIMMs are ordered

Thermal Support Matrix - Processors

Front End	Drive Configuration	Support Ambient	CPU TDP (cTDP)	FAN Type	Heatsink Type
SFF	SFF x8 SATA/SAS	35C	240W	Standard	Standard
SFF	SFF x10 SATA/SAS SFF NVMe	35C	240W	Performance	Standard
SFF	SFF x10 NVMe/SAS4/SAS/SATA	35C	300W	Performance	Performance
SFF	SFF x8 NVMe/SAS4/SAS/SATA	25C	400W	Performance	Performance
SFF	SFF x10 NVMe/SAS4/SAS/SATA	35C	400W	Performance	Direct Liquid Cooling
EDSFF	EDSFF 20 x 25W	35C	240W	Performance	Performance
EDSFF		35C	300W	Performance	Performance
EDSFF	EDSFF 12 x 25W	25C	400W	Performance	Performance
EDSFF	EDSFF 20 x 25W	35C	400W	Performance	Direct Liquid Cooling
GPU	EDSFF 8 x 25W SFF 4 x 25W	35C	240W	Performance	Performance
GPU		25C	300W	Performance	Performance
GPU		35C	400W	Performance	Direct Liquid Cooling

Notes: Scopes listed above are general support guidance. Support condition may vary depending on other options selected.

DIMM Support Matrix for Ambient Temperature

256GB Support Max Quantity

Configuration Information

Front End	256GB Support Max Quantity*	Support Ambient Temperature
SFF	24	25C
EDSFF	16	25C
GPU	20	25C
SFF/EDSFF/GPU with Direct Liquid Cooling	24/20/20	25C

16GB, 32GB, 64GB, 128GB Support Max Quantity

Front End	16GB, 32GB, 64GB, 128GB Support Max Quantity	Support Ambient Temperature
SFF	24	35C
EDSFF	24	35C
GPU	24	35C
SFF/EDSFF/GPU with Direct Liquid Cooling	24/24/24	35C

Notes: * Select 256GB DIMM need to use performance FAN support. Support conditions may vary depending on other options selected.

Step 2c: Choose Power Supplies

Select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT allowed.

HPE Flex Slot Power Supplies

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit	P44712-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38997-B21
HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21
HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P03178-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21

Notes:

- Mixing of different Power Supply SKU is not allowed
- 1600W -48VDC PSU requires 1x HPE 1600W DC PSU power lug option kit or HPE 1600W DC PSU Power Cable Kit
- 1800W-2200W PSU only supports high line voltage (200VAC to 240VAC)
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/info/poweradvisor>.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.

Step 2d: Choose Backplane

If front drives are needed in the server, please select one backplane from list below

HPE ProLiant DL365 Gen11 8SFF Tri-Mode U.3 x1 BC FIO Backplane Kit	P55020-B21
--	------------

Notes:

- x1 U.3 8SFF Drive cage can only support SAS/SATA/NVMe drives
- Configurable up to 1
- OROC and PCIe controllers support this backplane. OROC x1 or PCIe x1 cable kit selection is needed for controller support
- Mixture of x1 U.3 8SFF and x4 U.3 8SFF backplanes is ALLOWED

HPE ProLiant DL365 Gen11 8SFF Tri-Mode U.3 x4 BC FIO Backplane Kit	P55021-B21
--	------------

Notes:

Configuration Information

- x4 U.3 8SFF Drive cage can support SAS/SATA/NVMe drives
- Configurable up to 1
- OROC and PCIe controllers support this backplane. OROC x1/x2/x4 or PCIe x1/x4 cable kit is supportable for controller support
- Mixing of NVMe and SAS/ SATA is NOT allowed in the same drive cage if any Tri-mode controller is not selected for drive cage

HPE ProLiant DL365 Gen11 2SFF Tri-Mode U.3 x4 BC Balanced Backplane Kit P55025-B21

Notes:

- x4 U.3 2SFF Drive cage can support SAS/SATA/NVMe drives
- Configurable up to 1
- OROC and PCIe controllers support this backplane. OROC x1/x2/x4 or PCIe x1/x4 cable kit is supportable for controller support

HPE ProLiant DL365 Gen11 4SFF Tri-Mode U.3 x4 BC FIO Backplane Kit P63212-B21

Notes:

- Supported with GPU CTO model only
- Min/Max = 1 of this drive cage must be selected for GPU CTO model
- Supports NVMe drives only. SAS/SATA drives are not supported
- If this drive cage is selected, then internal controllers cannot be selected. Will be direct attached to motherboard

HPE ProLiant DL365 Gen11 8EDSFF NVMe FIO Backplane Kit P63215-B21

Notes:

- Supported with GPU CTO model only
- Min/Max = 1 of this drive cage must be selected for GPU CTO model
- If this drive cage is selected, then internal controllers cannot be selected. Will be direct attached to motherboard

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE ProLiant DL365 Gen11 NVMe FIO Trigger Kit P58763-B21

Notes:

- This trigger kit provides support for 10 SFF NVMe direct attach
- This trigger kit will select 8SFF x4 and 2SFF x4 drive cages
- NVMe drives need to be selected separately

HPE Security Options

HPE Trusted Supply Chain for HPE ProLiant P36394-B21

HPE Trusted Supply Chain E-LTU R6X85AAE

Notes:

- Intrusion Cable Kit (P48922-B21) must be selected with then Trusted Supply Chain Config
- If Trusted Supply Chain section is selected, only one instance of the HPE Trusted Supply Chain E-LTU software option is required per order (not per server)

System Insight Display Options

HPE ProLiant DL365 Gen11 SFF System Insight Display Module Kit P56924-B21

Configuration Information

Notes: Only quantity of one can be supported.

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below



Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

Software as a Service Management

HPE GreenLake for Compute Ops Management

Base SKU

HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS	R7A11AAE
--	----------

Upgrade SKUS

HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS	R7A10AAE
--	----------

HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS	R7A12AAE
--	----------

HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
--	----------

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
--	----------

Notes: For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

HPE GreenLake for Compute Ops Management Base SaaS	R6Z73AAE
--	----------

HPE Compute Cloud Management Server FIO Enablement	S1A05A
--	--------

For more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers - CTO only. No OEM. - Complete list can be found here: Latest Supported Server List:

<https://www.hpe.com/info/com-supported-servers>

HPE Unique Options

Riser Kits

The CTO or BTO server has 1x Primary riser by default. Here are the additional risers available to select

HPE ProLiant DL3X5 Gen11 1U x16 Low Profile Secondary Riser Kit	P55029-B21
---	------------

HPE ProLiant DL3X5 Gen11 1U x16 Riser Kit	P56915-B21
---	------------

Notes:

– Both riser kits are in the secondary slot.

– Low Profile Secondary riser kit (P55029-B21) must be selected when HPE NS204i-u Gen11 NVMe boot device (P48183-B21) in the order.

Core Options

Riser Support Matrix							
Primary Riser Part Number	Secondary Riser Part Number	Description	Riser position (number denotes number of slots present)		Bus width (Gen5 lanes)		Remark
			Primary	Secondary	Primary	Secondary	
Default riser	N/A	This is the default riser in the chassis.	1	0	X16	0	This scenario is valid for 8SFF CTO Svr
Default riser	Default riser	These are the default risers in the chassis.	1	1	X16	X16	This scenario is valid for EDSFF & GPU CTO Svrs
Default riser	P56915-B21	Default riser + HPE ProLiant DL3X5 Gen11 1U x16 Riser Kit	1	1	X16	X16	
Default riser	P55029-B21	Default riser + HPE ProLiant DL3X5 Gen11 1U x16 Low Profile Secondary Riser Kit	1	1	X16	X16	This scenario is when HPE NS204i-u Gen11 NVMe boot device (P48183-B21) is configured. In this case, the secondary slot will be a Low Profile PCIe slot

Cooling Options

HPE ProLiant DL3X5 Gen11 1U CPU Standard Heat Sink Kit	P58456-B21
HPE ProLiant DL3X5 Gen11 1U CPU Performance Heat Sink Kit	P58457-B21
HPE ProLiant DL3X5 Gen11 Direct Liquid Cooling Cold Plate Module FIO Kit From Boot Device	P62032-B21
HPE ProLiant DL3X5 Gen11 Direct Liquid Cooling Cold Plate Module FIO Kit From PCIe	P62035-B21
HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 55cm Quick Disconnect Tube Set FIO Kit	P62042-B21
HPE ProLiant Direct Liquid Cooling 450mm Female-Male Connection Quick Disconnect Tube Set FIO Kit	P62046-B21

Notes:

- Mixing of both Standard and Performance Heatsink is not allowed
- If any of "U.3 x4 drive cage" is selected, "Performance Heatsink or DLC Module" and 7 Performance Fans must be selected
- For processors less than 240W with 8x SAS/SATA drives configured, standard heat sink (P58456-B21) and standard fan kit(P58461-B21) are required
- For processors less than 240W with 10x SAS/SATA or NVMe drives configured, standard heat sink (P58456-B21) and performance fan kit(P58462-B21) are required
- For processors above 240W, performance heat sink kit (P58457-B21) and performance fan kit (P58462-B21), or DLC module and performance fan kit are required

Core Options

- If "PCIe DLC Module" is selected, then Maximum limit for PCIe card limit will be reduced from 2 to 1 per server. (DLC PCIe Module occupies Slot# 2)
- If DLC Module is selected, then quantity 2 of Processor and 1 of Secondary LP module must be selected.
- For EDSFF CTO model, if selected processor wattage is greater than or equal to 320W, then DLC module must be selected
- Max of 1 tube set can be selected
- If DLC Module is selected, then tube set must be selected and vice versa.
- 55cm Quick Disconnect Tube Set supported with 8SFF/EDSFF CTO model only
- 450mm(45cm) Quick Disconnect Tube Set supported with GPU CTO model only

HPE ProLiant DL3XX Gen11 1U Standard Fan Kit
 HPE ProLiant DL3XX Gen11 1U Performance Fan Kit

P58461-B21
 P58462-B21

Notes:

- Gen11 Fan Kits contain only 1 fan
- 1-socket config 5 Standard Fan kits, 2-socket config needs 7 Standard Fan kits
- 1-socket config 5 Performance Fan kits, 2-socket config needs 7 Performance Fan kits

Cooling options summary			
CPU cTDP	≤ 240W (8x SAS/SATA drives)	≤ 240W (10x SAS/SATA or =>1 NVMe drives)	>240W
Heatsink	Standard 1U H/S	Standard 1U H/S	Performance 1U H/S
Fans	Standard Fans	Performance Fans	Performance Fans

HPE Boot Controllers

HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device
 HPE ProLiant DL3X5 Gen11 NS204i-u NVMe Hot Plug Boot Device Cable Kit

P48183-B21
 P57013-B21

Notes:

- NS204i-u is the HPE Gen11 Hot Pluggable M.2 NVMe RAIDed Boot Device
- HPE DL3X5 Gen11 NS204i-u NVMe Boot Cable Kit is required when the NS204i-u boot device is configured along with the 4LFF rear cage
- If NS204i-u Gen11 is selected, then 7 quantities of fan must be selected
 If NS204i-u Gen11 is selected and secondary riser is required, HPE DL3X5 Gen11 1U x16 LP Sec Riser Kit must be selected

HPE Optical Drives and Option Kit

HPE 9.5mm SATA DVD-ROM Optical Drive
 HPE 9.5mm SATA DVD-RW Optical Drive
 HPE Mobile USB DVD-RW Optical Drive
 HPE ProLiant DL365 Gen11 2SFF Display Port ODD Blank Kit


726536-B21
 726537-B21
 701498-B21
 P56899-B21

Core Options

Notes:

- Maximum 1 Optical Drive is supported
- ODD needs selection of a HPE DL365 Gen11 2SFF DP ODD Blank Kit

HPE RAID Controllers

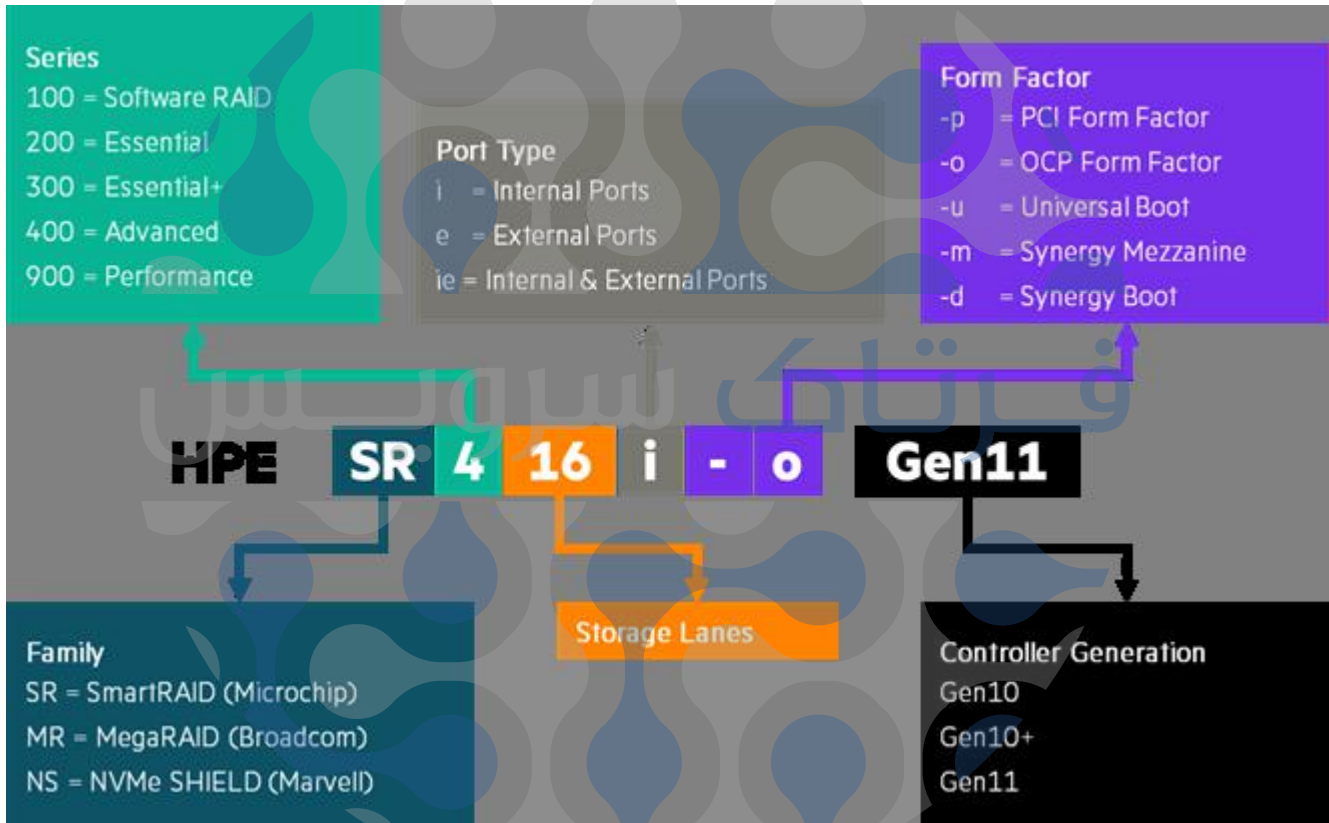

Notes:

- When selecting SR RAID controllers for external storage (E208e, 804398-B21) and MR RAID controllers for internal storage (MR216i/MR416i/MR408i) in the order, please be aware these two products use different RAID configuration tools.
- Not supporting mixing of MR (MegaRAID) series internal controllers and SR (SmartRAID) series internal controllers
- MR (MegaRAID) series controllers are not supported with Intelligent Provisioning feature
- For more information on the HPE Gen11 Storage Controller, please refer to:

[HPE Compute MR Gen11 Controllers Quick Specs](#)

[HPE Compute SR Gen11 Controllers Quick Specs](#)

Essential RAID Controllers

Core Options

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller 804398-B21

Notes:

- This controller supports up to 8 SAS/SATA Drives (external)
- For E208e-p Controller:
 - o Controller Based Encryption (CBE) with a remote key management server is not supported. Local key management (LKM) is supported
 - o One Button Secure Erase (OBSE) used to sanitize drives and factory reset the controller is not supported
- For more information on the HPE Smart Array E208i-p SR Gen10 Controller, please refer to the [QuickSpecs](#)

Tri-mode RAID Controllers

HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller P47789-B21

Notes:

- This is an OROC type controller which takes up an OCP slot
- This controller supports up to 16 SAS/SATA/NVMe Drives (Only 4 x4 NVMe drives can be supported; 8 x2 NVMe drives can be supported)

HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller P58335-B21

Notes:

- This is an OROC type controller which takes up an OCP slot
- This controller supports up to 8 SAS/SATA/NVMe Drives (Only 2 x4 NVMe drives can be supported; 4 x2 NVMe drives can be supported)

HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller P47781-B21

Notes:

- This is an OROC type controller which takes up an OCP slot
- This controller supports up to 16 SAS/SATA/NVMe Drives (Only 4 x4 NVMe drives can be supported; 8 x2 NVMe drives can be supported)

HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller P47785-B21

Notes:

- This is an PCIe type controller which takes up a PCIe slot
- This controller supports up to 16 SAS/SATA/NVMe Drives (Only 4 x4 NVMe drives can be supported; 8 x2 NVMe drives can be supported)

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller P47777-B21

Notes:

- This is an PCIe type controller which takes up a PCIe slot
- This controller supports up to 16 SAS/SATA/NVMe Drives (Only 4 x4 NVMe drives can be supported; 8 x2 NVMe drives can be supported)

HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage Controller P47184-B21

Notes:

- This is an PCIe type controller which takes up a PCIe slot
- This controller supports up to 32 SAS/SATA/NVMe Drives (Only 8 x4 NVMe drives can be supported)

Core Options

supported; 16 x2 NVMe drives can be supported)

Controller Battery Cable Kits

HPE Smart Storage Hybrid Capacitor with 260mm Cable Kit	P02381-B21
HPE 96W Smart Storage Lithium-ion Battery with 260mm Cable Kit	P01367-B21
HPE ProLiant DL3X5 Gen11 Smart Storage Battery 2P 96W Cable Kit	P57884-B21

Notes:

- The two 260mm battery cable kit can't be selected together.
- The Extension cable kit is required for either the selection of Hybrid Capacitor or 96W Smart Storage Battery

HPE Drives

Enterprise - 12G SAS - SFF Drives

HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P28028-B21
HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P28352-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P28586-B21
HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P40430-B21
HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P40432-B21
HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD	P53560-B21
HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P53561-B21
HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD	P53562-B21

Midline - 12G SAS - SFF Drives

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD	P28586-B21
--	------------

Midline - 6G SATA - SFF Drives

HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21

SED (Self-Encryption Drive)

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Self-encrypting FIPS HDD	P28618-B21
HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Self-encrypting FIPS HDD	P28622-B21

Notes:

- Requirements for MR Tri-mode controller SED support
 - o TPM is not required for Local Key Management as key is stored in controller
 - o iLO Advanced is required for Remote Key Management. Key is stored in remote key manager}

(Ex. ESKM)

SSD Selection

Read Intensive - 12G SAS - SFF - Solid State Drives

Core Options

HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40506-B21
HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40507-B21
HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40508-B21
HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40509-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21
HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49031-B21
HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49035-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49041-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Self-encrypting FIPS PM6 SSD	P41399-B21
HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49045-B21
Mixed Use - 12G SAS - SFF - Solid State Drives	
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B21
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B21
HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B21
HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Self-encrypting FIPS PM6 SSD	P41401-B21
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B21
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B21
Mixed Use - 6G SATA - SFF - Solid State Drives	
HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B21
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B21
HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B21
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58248-B21
Read Intensive - 6G SATA - SFF - Solid State Drives	
HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B21
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B21
HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B21
HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58240-B21
Read Intensive - NVMe - SFF - Solid State Drives	
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63829-B21

Core Options

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41402-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41403-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64842-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64844-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-B21
HPE 1.9TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47845-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static Multi Vendor SSD	P47847-B21
Mixed Use - NVMe - SFF - Solid State Drives	
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41404-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC Self-encrypting FIPS U.3 CM6 SSD	P41405-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65007-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65015-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47837-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47838-B21
HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD	P47839-B21

Core Options

HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static Multi Vendor SSD P47840-B21

NVMe Mainstream Performance Read Intensive EDSFF E3.S SSDs

HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD P56585-B21

HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD P56586-B21

HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF CD7 SSD P56587-B21

NVMe Mainstream Performance Very Read Intensive EDSFF E3.S SSDs

HPE 3.84TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD P63930-B21

HPE 7.68TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD P63934-B21

HPE 15.36TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD P63938-B21

NVMe High Performance Read Intensive EDSFF E3.S SSDs

HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD P61179-B21

HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD P57799-B21

HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD P61183-B21

HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD P57803-B21

HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD P61877-B21

HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD P57807-B21

NVMe Mainstream Performance Mixed Use EDSFF E3.S SSDs

HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD P61191-B21

HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD P61195-B21

HPE Computation and Graphics Accelerator and related option kits

NVIDIA A16 64GB PCIe Non-CEC Accelerator for HPE R8T26C

HPE ProLiant DL365 Gen11 CPU 8-pin GPU Power Cable Kit P56919-B21

Notes:

- Supported with GPU CTO model only.
- If more than one quantity of Graphics option is selected, then partnumber must be same. Different Graphics option cannot be mixed within the server.
- If Graphics Option is selected, then "HPE DL365 Gen11 CPU 8p GPU Pwr Cbl Kit" must be selected per Graphics Option and vice versa.

Core Options

HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products

<http://www.hpe.com/storage/BURACompatibility>

HPE Storage Options

Emulex Fibre Channel HBAs

HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A
HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter	R7N77A
HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter	R7N78A

QLogic Fibre Channel HBAs

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A
HPE SN1700Q 64Gb 1-port Fibre Channel Host Bus Adapter	R7N86A
HPE SN1700Q 64Gb 2-port Fibre Channel Host Bus Adapter	R7N87A

HPE Networking

1 Gigabit Ethernet adapters

Intel I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P21106-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P51178-B21

10 Gigabit Ethernet adapters

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE	P26253-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE	P26259-B21

10/25 Gigabit Ethernet adapters

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P26264-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P42044-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21
HPE Ethernet 10/25Gb 2-port Secure Network Adapter	S2A69A

100/200 Gigabit Ethernet adapters

Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE	P21112-B21
Mellanox MCX623105AS-VDAT Ethernet 200Gb 1-port QSFP56 Adapter for HPE	P10180-B21

Notes:

- Almost all PCIe Networking Cards need 7x Performance Fans. Refer to OCA configurator for exceptions and details
- Ambient temperature for above cards (P08458-B21, P25960-B21, P21112-B21, P10180-

Core Options

B21) is 25C under configuration of 8SFF SAS/SATA/NVMe/SAS4, with AOC (Active Optical Cables)

- Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately. Please see the related NIC QuickSpecs for Technical Specifications and additional information:

<https://h20195.www2.hpe.com/v2/getpdf.aspx/A00002507ENW.pdf>

OCP Adapter

1 Gigabit Ethernet OCP adapters

Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21

10 Gigabit Ethernet OCP Adapters

Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21

10/25 Gigabit Ethernet OCP adapters

Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P26269-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21

100/200 Gigabit Ethernet adapters

Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21
--	------------

Notes:

- Almost all PCIe Networking Cards need 7x Performance Fans. Refer to OCA configurator for exceptions and details
- P22767-B21 and P26269-B21 needs selection of an OCP upgrade cable kit
- Ambient temperature for above cards (P26269-B21) is 25C under configuration of 8SFF SAS/SATA/NVMe/SAS4, with AOC (Active Optical Cables)
- P22767-B21 not allowed to select under configuration of 8SFF SAS/SATA/NVMe/SAS4, with AOC (Active Optical Cables)
- Ambient temperature for above cards (P22767-B21) is 25C under configuration of 8SFF SAS/SATA/NVMe/SAS4, with Direct Attach Cable (DAC)

HPE InfiniBand

HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe4 x16 MCX653105A-ECAT Adapter	P23665-B21
HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe4 x16 MCX653106A-ECAT Adapter	P23666-B21
HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 MCX653105A-HDAT Adapter	P23664-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 MCX653106A-HDAT Adapter	P31324-B21
HPE InfiniBand NDR 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-B21

Core Options

HPE InfiniBand NDR200 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter	P45642-B21
HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe4 x16 OCP3 MCX653435A-HDAI Adapter	P31323-B21
HPE InfiniBand HDR/Ethernet 200Gb 2-port QSFP56 PCIe4 x16 OCP3 MCX653436A-HDAI Adapter	P31348-B21

Notes:

- All InfiniBand options require 6 performance fan kit
- For InfiniBand OCP options, OCP upgrade kit is needed
- Ambient temperature for above cards (P23666-B21, P23664-B21, P45641-B21, P45642-B21, P31323-B21) is 25C under configuration of 8SFF SAS/SATA/NVMe/SAS4, with AOC (Active Optical Cables)
- P31324-B21 and P31348-B21 are not allowed to select under configuration of 8SFF SAS/SATA/NVMe/SAS4, with AOC (Active Optical Cables)
- Ambient temperature for above cards (P31324-B21 and P31348-B21) is 25C under configuration of 8SFF SAS/SATA/NVMe/SAS4, with Direct Attach Cable (DAC)
- For more information, please visit: [HPE InfiniBand Options for HPE ProLiant and Apollo Servers](#)

HPE ProLiant DL3X5 Gen11 x16 OCP1 1P Upgrade Cable Kit	P57882-B21
--	------------

Notes: This cable kit cannot be selected when 2 processors are configured. When this kit is selected, max of 1 OCP card can be selected per server

HPE ProLiant DL3X5 Gen11 x16 OCP1 OCP2 2P Upgrade Cable Kit	P57849-B21
---	------------

Notes: This cable kit needs 2 processors configured

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

Notes:

- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at:

<https://poweradvisorext.it.hpe.com/?Page=Index>

- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE Power Cords and Cables](#) for a full list of optional power cords.

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P38995-B21
---	------------

Notes: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit	P17023-B21
--	------------

Core Options

Notes:

- Flex Slot universal power supplies support power efficiency of up to 94% and support both 277VAC/380VDC power inputs.
- HPE 1600W DC PSU Power Lug Option Kit (P36877-B21) must be selected along with this power supplies.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38997-B21

Notes:

- Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- The power supply selected only supports high line voltage (200VAC to 240VAC)

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit

P44712-B21

Notes:

- Flex Slot Titanium power supplies support power efficiency of up to 96% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).
- The power supply selected only supports high line voltage (200VAC to 240VAC)

HPE 1600W -48VDC Power Cable Lug Kit

P36877-B21

Notes: Must be selected along with HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit (P17023-B21)



Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management

HPE iLO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21

HPE Converged Infrastructure Management Software

HPE OneView Standard 1yr 9x5 Support Flexible Quantity E-RTU	K6F98AAE
HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE
HPE OneView Upgrade from Insight Management 3yr 24x7 Support 1-server LTU	F6Q91A
HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Track 1-server LTU	E5Y36A
HPE OneView for ProLiant DL Server including 3yr 24x7 Support Bundle Track 1-server LTU	E5Y44A
HPE OneView Upgrade from Insight Management including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y45AAE

Notes: Licenses ship without media. The HPE OneView Media Kit can be ordered separately or can be [downloaded](#).

HPE Security

HPE Bezel Lock Kit	875519-B21
HPE ProLiant DL3XX Gen11 Intrusion Cable Kit	P48922-B21
HPE ProLiant Gen11 1U Common Bezel Kit	P50450-B21

Cable Kits

HPE ProLiant DL365 Gen11 XGMI Interconnection Cable Kit	P63125-B21
---	------------

Additional Options

Notes:

- Max q'ty 1 can be selected per system
- If selected, then 2 processors must be selected
- Supported with 8SFF CTO model only

HPE ProLiant DL365 Gen11 8SFF OROC x1 SAS/SATA/NVMe Cable Kit P56901-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports the HPE DL365 G11 8SFF TM U.3 x1 FIO Backplane Kit and an OROC storage controller

HPE ProLiant DL365 Gen11 8SFF x1 SAS/SATA/NVMe PCIe Cable Kit P56903-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports the HPE DL365 G11 8SFF TM U.3 x1 FIO Backplane Kit and an PCIe storage controller

HPE ProLiant DL365 Gen11 2SFF OROC x1 SAS/SATA Cable Kit P56905-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports below backplane kits:
- HPE DL365 G11 2SFF TM U.3 x4 Bal BP Kit

HPE ProLiant DL365 Gen11 2SFF x1 SAS/SATA PCIe Cable Kit P56907-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports below backplane kits:
- HPE DL365 G11 2SFF TM U.3 x4 Bal BP Kit

HPE ProLiant DL365 Gen11 2SFF SATA Direct Attach Cable Kit P56909-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit only supports the HPE DL365 G11 2SFF TM U.3 x4 Bal Backplane Kit

HPE ProLiant DL365 Gen11 8SFF x4 Tri-Mode PCIe Cable Kit P56911-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports below backplane kits:
- HPE DL365 G11 8SFF TM U.3 x4 Bal BP Kit

HPE ProLiant DL365 Gen11 8SFF OROC Tri-Mode Splitter Cable Kit P56913-B21

Notes:

- Max q'ty 1 can be selected per system
- This cable kit supports connection with a 8SFF Tri-mode U.3 x4 backplane and an OROC controller

Additional Options

HPE ProLiant DL365 Gen11 8SFF NVMe Direct Attach Balanced Cable Kit	P56917-B21
HPE ProLiant DL365 Gen11 2SFF NVMe Direct Attach Balanced Cable Kit	P56918-B21

Notes: The 8SFF and 2SFF NVMe Direct Attach Balance Cable kits support direct attach for the NVMe drives on the 8SFF and 2SFF TM backplanes

HPE ProLiant DL36X Gen11 Rear Serial Port Cable Kit	P59431-B21
HPE ProLiant DL365 Gen11 GPU 4SFF x4 OCP Tri-Mode Cable Kit	P69876-B21
HPE ProLiant DL3X5 Gen11 GPU 4SFF x4 PCIe Tri-Mode Cable Kit	P70318-B21

Notes: GPU CTO

- Maximum 1 Quantity of GPU 4SFF Cable kit can be selected
- If P69876-B21 is selected, then 4SFF x4 U.3 Drive Cage and MR416i-o controller must be selected
- If P70318-B21 is selected, then 4SFF x4 U.3 Drive Cage and MR416i-p controller must be selected

HPE Rail Kits

Notes:

- HPE rail kits are designed to work with HPE racks in compliance with industry standard EIA-310-E. In the event a customer elects to purchase a third-party rack for use with an HPE rail kit, any such use is at customer's own risk. HPE makes no express or implied warranties with respect to such third-party racks and specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. Furthermore, HPE has no obligation and assumes no liability for the materials, design, specifications, installation, safety, and compatibility of any such third-party racks with any rail kits, including HPE rail kits.
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.
- CTO Models do not ship with rail kits, they need to be ordered separately

HPE DL3XX Gen11 Easy Install Rail 2 Kit	P52351-B21
---	------------

Notes: Supported on both SFF and LFF Models

HPE ProLiant DL300 Gen10 Plus 1U Cable Management Arm for Rail Kit	P26489-B21
--	------------

Notes: Supportable when rail kit is selected

HPE Racks

- Please see the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications. **HPE G2 Advanced Series Racks**
- Please see the HPE Enterprise Series Racks QuickSpecs for information on additional racks options and rack specifications. **HPE G2 Enterprise Series Racks**

Additional Options

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Disk-Based Backup

HPE RDX External Docking Station	C8S07B
HPE RDX 500GB Removable Disk Cartridge	Q2042A
HPE RDX 1TB Removable Disk Cartridge	Q2044A
HPE RDX 2TB Removable Disk Cartridge	Q2046A
HPE RDX 4TB Removable Disk Cartridge	Q2048A

HPE Support Services Installation & Start-up Services

Installation Services

HPE ProLiant DL/ML Install Service	U4554E
HPE ProLiant DL/ML Startup Service	U4555E


Tech Care

HPE 3 Year Tech Care Essential DL365 GEN11 Service	H79C4E
HPE 3 Year Tech Care Essential wDMR DL365 GEN11 Service	H79C5E
HPE 5 Year Tech Care Essential DL365 GEN11 Service	H79E8E
HPE 5 Year Tech Care Essential wDMR DL365 GEN11 Service	H79E9E

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.

Memory

Memory Population guidelines

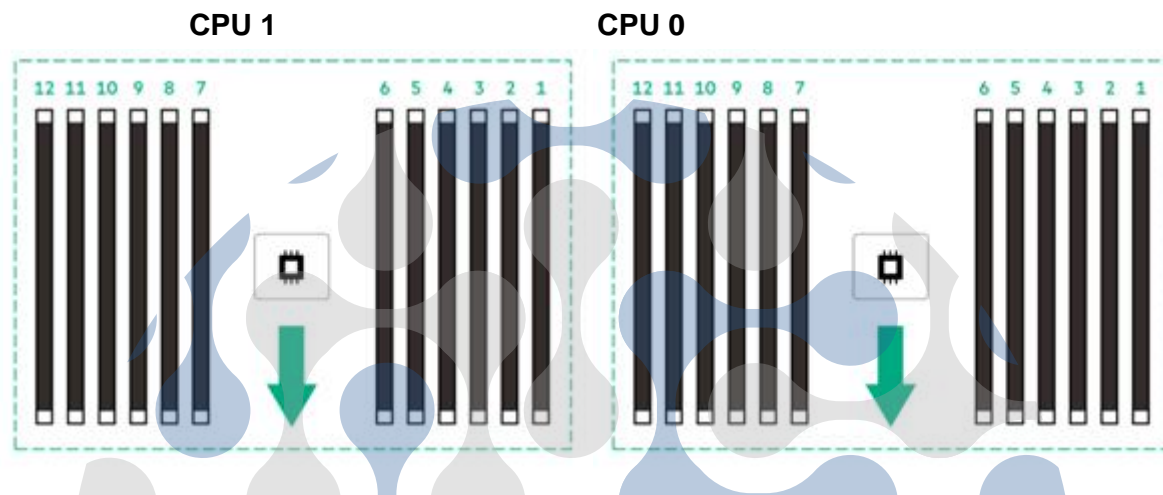

Front side of the server

General Memory Population Rules and Guidelines

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- To realize the performance memory capabilities listed in this document, HPE DDR5 Smart Memory is required. For additional information, please see the: **HPE DDR5 Smart Memory QuickSpecs**
- For General Server Memory and Persistent Memory Population Rules and Guidelines, see details here:
<http://www.hpe.com/docs/memory-population-rules>
- For details on the HPE Server Memory speed, visit: **Server memory population rules for HPE ProLiant Gen11 servers with AMD EPYC 9004 series processors**

Technical Specifications

System Unit

- **Dimensions (Height x Width x Depth)**

4.29 X 44.89 X 64.94 cm

1.69 X 17.67 X 25.57 in

- **Packaging**

91.6 X 60 X 24.2 cm

36.06 X 23.63 X 9.53 in

- **Weight (approximate)**

12.70 kg

27.94 lb

– **SFF Minimum:** 8 SFF chassis with 8 HDD blanks, 2x Drive Bay blanks, 1x processor including standard heat sink, 2x DIMMs, 1x power supply (plus blank), 1x Smart Array, 1x Riser installed, cables for the above)

o 12.70 kg

o 27.94 lb

- **Packaged weight**

o 24.36 kg

o 53.7 lb

– **SFF Maximum:** 10x SFF hard drives, 2x processors, 2 heat sinks, 2x power supplies, 1x Smart Array, 2x Risers installed, 16x DIMMs, 2x power supply, cables for the above

o 18.39 kg

o 40.46 lb

- **Packaged weight**

o 29.36 kg

o 64.73 lb

Input Requirements (per power supply)

Rated Line Voltage

- 100 to 120 VAC
- 200 to 240 VAC

BTU Rating

Technical Specifications

Maximum

- For 1600W Power Supply: 5918 BTU/hr (at 200 VAC), 5884 BTU/hr (at 240 VAC) for China
- For 800W Power Supply: 3207 BTU/hr (at 100 VAC), 3071 BTU/hr (at 200 VAC), 3112 BTU/hr (at 240 VAC) for China Only
- For 500W Power Supply: 1979 BTU/hr (at 100 VAC), 1911 BTU/hr (at 200 VAC), 1965 BTU/hr (at 240 VAC) for China Only

Power Supply Output (per power supply)

- **Rated Steady-State Power**

- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VAC)
- For 800W Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VAC) input for China only
- For 500W Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VAC) input for China only

- **Maximum Peak Power**

- For 1600W Power Supply: 1600W (at 200 to 240 1VAC), 1600W (at 240 VAC) input for China only
- For 800W Power Supply: 800W (at 100 to 127 VAC), 800W (at 200 to 240 1VAC), 800W (at 240 VAC) input for China only
- For 500W Power Supply: 500W (at 100 to 127 VAC), 500W (at 200 to 240 VAC), 500W (at 240 VAC) input for China only

System Inlet Temperature

- **Standard Operating Temperature**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

- **Extended Ambient Operating Temperature**

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<https://www.hpe.com/support/ASHRAEGen11>

Technical Specifications

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<https://www.hpe.com/support/ASHRAEGen11>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity(non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Altitude

- **Operating**

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

- **Non-operating**

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC) - Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Technical Specifications

HPE RAID Controllers

For latest information on **HPE Gen11 RAID Controllers for HPE ProLiant DL Servers** please refer to their QuickSpecs. .

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Acoustic Noise

Listed are the declared A-Weighted sound power levels (L_{WAd}) and declared average bystander position A-Weighted sound pressure levels (L_{pAm}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Idle	
LWAd	4.9 B Base
LpAm	35 dBA Base
Operating	
LWAd	5.9 B Base
LpAm	46 dBA Base

Notes:

- Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.
- Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.
- The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.

Summary of Changes

Date	Version History	Action	Description of Change
20-May-2024	Version 17	Changed	Overview, Standard Features, Pre-Configured Models, Configuration Information and Core Options sections were updated.
22-Apr-2024	Version 16	Changed	Overview, Standard Features, Pre-Configured Models, Configuration Information and Core Options sections were updated. Updates: Standard features (overview, What's new, processor) sections, BTO SKU Part Numbers. Added: Processor table, Thermal Support matrix table, 128GB dual rank memory SKU (P69982-B21), Cable kits for GPU 4SSF (P69876-B21, P70318-B21), 6G & 12G SAS SATA SFF drives (P285861-B21, P40498-B21, P40499-B21), Read Intensive NVMe SFF SSDs, Mixed Use NVMe SFF SSDs and NVMe High Performance Read Intensive EDSFF E3.S SSDs, and NVMe Mainstream Performance Very Read Optimized SKUs Removed: Memory 32GB SRx4 SKU P50310-B21, 12G SAS SFF drives 1TB/ 2TB (P28505-B21, P53563-B21), 6G SATA SFF drives (P28610-B21, P28500-B21), and very Read Optimized SATA SFF (P58288-B21)
18-Mar-2024	Version 15	Changed	Standard Features, Core Options and Additional Options sections were updated.
08-Jan-2024	Version 14	Changed	Service and Support and Core Options sections were updated. (Added a new Riser Support Matrix in the Core Options section. Added new CM7 EDSFF E3.S 1T drives)
04-Dec-2023	Version 13	Changed	Service and Support, Configuration Information and Core Options sections were updated.
02-Oct-2023	Version 12	Changed	Core Options section was updated.
05-Sep-2023	Version 11	Changed	Overview, Configuration Information, and Core Options sections were updated
07-Aug-2023	Version 10	Changed	Standard Features, Configuration Information, Core Options and Additional Options sections were updated
10-Jul-2023	Version 9	Changed	Standard Features, Service and Support, Core Options, and Technical Specifications sections were updated.
13-Jun-2023	Version 8	Changed	Standard Features, Service and Support, Pre-Configured Models, Configuration Information, Core Options, and Additional Options sections were updated
01-May-2023	Version 7	Changed	Standard Features and Core Options sections were updated.
03-Apr-2023	Version 6	Changed	Standard Features, Configuration Information and Technical Specifications sections were updated
06-Mar-2023	Version 5	Changed	Standard Features section was updated.
06-Feb-2023	Version 4	Changed	Overview, Standard Features, Configuration Information, additional Options and Technical Specifications sections were updated.
19-Dec-2022	Version 3	Changed	Standard Features section was updated.
05-Dec-2022	Version 2	Changed	Standard Features, Configuration Information, Core Options and Additional Options sections were updated.


Summary of Changes

10-Nov-2022 | Version 1 | New | New QuickSpecs



Copyright

Make the right purchase decision. Contact our presales specialists.



© Copyright 2024 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

AMD® and EPYC® are registered trademarks of Advanced Micro Devices Corporation in the U.S. and other countries.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a50004299enw - 16903 - Worldwide - V17 - 20-May-2024

